


Ribbon Go 5 Top/Side

A perfect solution for a variety of applications, including linear, flexible, creative ambient projects, curved lighting and freeform applications.

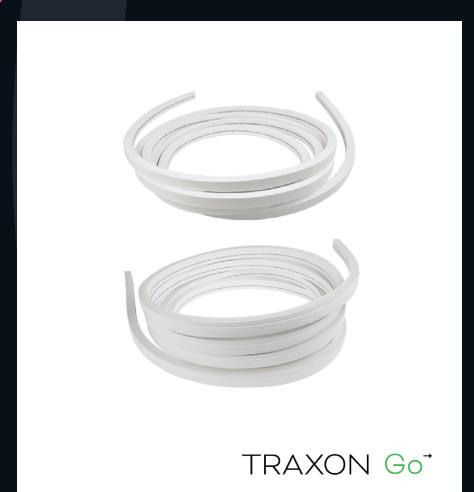

Product Highlights:

- Top bending and side bending
- Up to 1200lm/m
- Ra80/90
- White, Dynamic White, RGB, RGBW options
- ON/OFF, DALI, PWM, 0-10V, 1-10V, DMX2PWM Dimmer, Radio Frequency
- IP67
- Lumen Maintenance L70@25° - 50,000 Hrs



TRAXON | leucue
MEMBER OF PROSPERITY GROUP

Ribbon Go 5 Top/Side

The Traxon Ribbon Go 5 Top/Side family are flexible LED diffused ribbons, which are reliable and multi-optional with comprehensive features, available in both top-bending and side-bending versions, outdoor use with their IP67 rating, making them the perfect solution for a variety of applications, including linear, flexible, creative ambient projects, curved lighting and free-form applications.



Applications

- Accent Lighting in shopping malls, hotels, restaurants, residential installations
- Decorative Lighting
- Architectural Lighting

Advantages & Benefits

High performance and reliability

- Up to 1200lm/m
- Ra80/90
- Lumen Maintenance L70@25°
 - 50,000 Hrs
- Warranty 5 years


Easy to install

- Flexible fitting on curved surfaces
- 500mm input cable
- Easy to cut and install

Full range to fulfill all applications


- White, Dynamic White, RGB, RGBW options
- Available with IP67 outdoor version
- 2700/3000/3500/4000/5000/6500K
- Power range from 3.4W to 16.7W
- ON/OFF, DALI, PWM, 0-10V, 1-10V, DMX2PWM Dimmer, Radio Frequency (Dimming is possible with optional accessories.)
- Variety of mounting options
- Complete connection solutions

Photometrics

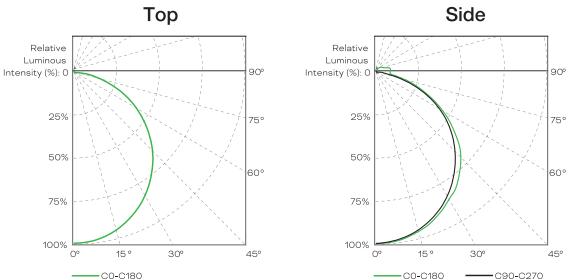


Dimensions

Top

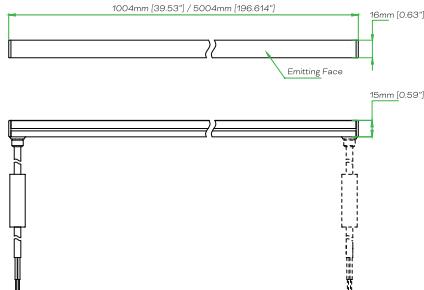

Side

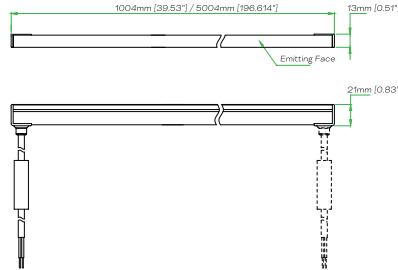

Product Configurator

RIBBON GO 5 Form Input Voltage Power/meter CRI CCT/Color LEDs/meter Length Cable feed IP Grade

Form	Input Voltage	Power/meter	CRI	CCT	LEDs/meter	Length	Cable feed	IP Grade
TP Top	DC 24V DC	Top	8 Ra80	27 2700K	140 140 LEDs/m	5m	B2	IP67
SD Side		Side	9 Ra90	30 3000K	84 84 LEDs/m	1m		
		7W/m	35 3500K	168 168 LEDs/m				
		11.1W/m	40 4000K	196 196 LEDs/m				
		W Ra90 4.1W/m	6W/m	50 5000K				
		8.6W/m	9.2W/m	65 6500K				
		13.6W/m	16.7W/m	RGB RGB				
		RGB 10.3W/m	15W/m	RGBW RGBW				
		RGBW Ra80 14.1W/m	15W/m	DW DW				
		RGBW Ra90 14.1W/m	15W/m					
		DW Ra80 7.9W/m	11.5W/m					
		DW Ra90 9.6W/m	14.2W/m					

v1.0 05/24 · Technical data subject to variation and change without notice.



TRAXON | ecue
MEMBER OF PROSPERITY GROUP

www.traxon-ecue.com