

# Ribbon Go 5 OB/Flat

A perfect solution for a variety of applications, including linear, flexible, creative ambient projects, curved lighting and freeform applications.



## Product Highlights:

- Up to 4000lm/m
- Ra80/90, 3 SDCM
- White, Dynamic White, RGB, RGBW options
- ON/OFF, DALI, PWM, 0-10V, 1-10V, DMX2PWM Dimmer, Radio Frequency
- Available with IP20 indoor and IP66 outdoor versions
- Lumen Maintenance L70@25° - 50,000 Hrs



TRAXON | e2cue

MEMBER OF PROSPERITY GROUP

# Ribbon Go 5 OB/Flat

The Traxon Ribbon Go 5 OB/Flat family are flexible LED ribbons, which are reliable and multi-optional with comprehensive features, available in both indoor IP20 and outdoor IP66 versions, making them the perfect solution for a variety of applications, including linear, flexible, creative ambient projects, curved lighting and freeform applications.



## Applications

- General Lighting in shopping malls, hotels, restaurants, residential installations
- Decorative lighting
- Architectural lighting

## Advantages & Benefits

High performance and reliability

- Up to 4000lm/m
- Ra80/90, 3 SDCM
- Lumen Maintenance L70@25° - 50,000 Hrs
- Warranty 5 years


Easy to install

- Flexible fitting on curved surfaces
- 500mm input cable
- Easy to cut and install

Full range to fulfill all applications


- White, Dynamic White, RGB, RGBW options
- Available with IP20 indoor and IP66 outdoor versions
- 2700/3000/3500/4000/5000/6500K
- Power range from 2W to 26.5W
- ON/OFF, DALI, PWM, 0-10V, 1-10V, DMX2PWM Dimmer, Radio Frequency (Dimming is possible with optional accessories.)
- Variety of mounting options
- Complete connection solutions

## Photometrics

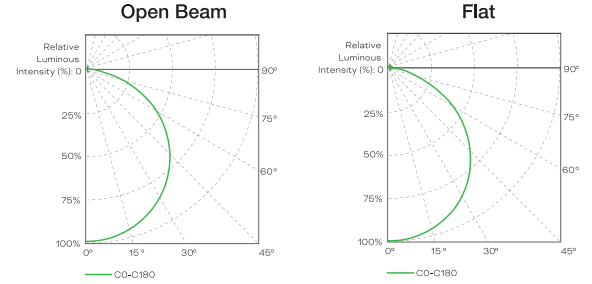


## Dimensions

### Open Beam

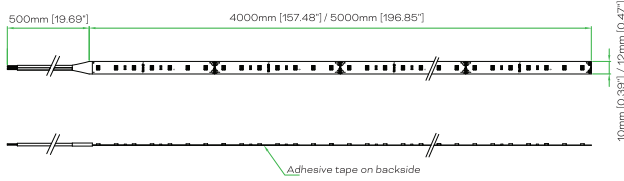

### Flat

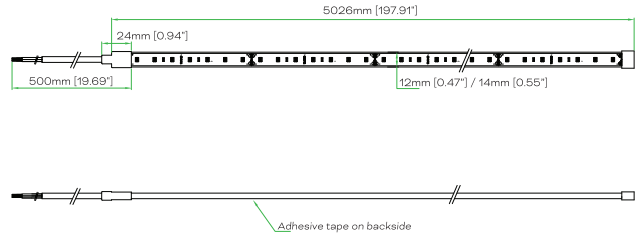

## Product Configurator

RIBBON GO 5		Form	Input Voltage	Power/meter	CRI	CCT/Color	LEDs/meter	Length	IP Grade
Form	Input Voltage	Power/meter	CRI	CCT	LEDs/meter	Length	IP Grade		
<b>OB</b> Open Beam	<b>DC</b> 24V DC	<b>W 70</b> 2W/m	<b>W 140</b> 4W/m	<b>8</b> Ra80	<b>27</b> 2700K	<b>70</b> 70 LEDs/m	<b>5m</b>	<b>IP20</b>	
<b>FL</b> Flat		7.1W/m	6.8W/m	9 Ra90	30 3000K	140 140 LEDs/m	4m	IP66	
		13.5W/m	10.5W/m		35 3500K	60 60 LEDs/m			
		19.5W/m	14.6W/m		40 4000K	120 120 LEDs/m			
		26.5W/m	20W/m		50 5000K				
		RGB 10.5W/m	25.8W/m		65 6500K				
		RGBW 13.7W/m	DW 13.7W/m		RGB RGB				
					RGBW RGBW				
					DW DW				

v1.0 04/24 · Technical data subject to variation and change without notice.