



Product Highlights:

- Precise optics control
- RGBW for fine-tuned color
- DMX control
- Auto-addressing

Light is powerful

ARCHISHAPE® 2.5 Washer

A compact, yet powerful flood light for façade illumination.

Light is **OSRAM**

ARCHISHAPE® 2.5 Washer



ARCHISHAPE® 2.5 Washer series is a compact, yet powerful flood light for facade illumination. The luminaire delivers highly consistent, fine-tuned color with superior RGBW color mixing for long distance dynamic lighting applications. The robust ARCHISHAPE® 2.5 Washer product series offers a variety of color and white CCT options, beam angles and power ranges with either static on/off or dynamic control options via standard DMX-512 and optional RDM functionality.

Advantages & Benefits

Superior color mixing

- Precise optics control
- RGBW for fine-tuned color

DMX control

- Dimmable
- Dynamic lighting control



Easy installation and maintenance

- Auto-addressing
- Quick installation and reliable connection by self-locking waterproof connectors
- RDM status feedback (Optional)

Applications

- Building façades
- Landscapes
- Bridges
- Area structures



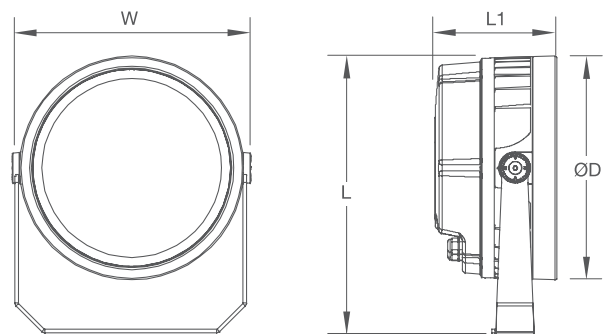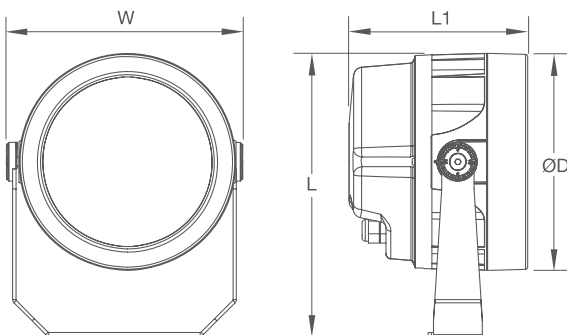







Dimensions



	9W	36W
ØD	120mm	200mm
W	135mm	219mm
L	160mm	262mm
L1	85mm	165mm

	54W/90W	150W	180W
ØD	275mm	348mm	398mm
W	297mm	354mm	415mm
L	349mm	426mm	475mm
L1	200mm	185mm	206mm

ARCHISHAPE® 2.5 Washer

Product Reference	Ordering Code (EAN40)										
Fixture (AC Version)											
AS WS M AC 54W 830 4D5 ONOFF	4062172083270	Warm White	AC	220-240	54	50	4.5	3000	4320	275	200
AS WS M AC 54W 840 4D5 ONOFF	4062172083119	Neutral White	AC	220-240	54	50	4.5	4000	4590	275	200
AS WS M AC 54W 830 10D ONOFF	4062172083287	Warm White	AC	220-240	54	50	10	3000	4320	275	200
AS WS M AC 54W 840 10D ONOFF	4062172083171	Neutral White	AC	220-240	54	50	10	4000	4590	275	200
AS WS M AC 54W 830 30D ONOFF	4062172083294	Warm White	AC	220-240	54	50	30	3000	4320	275	200
AS WS M AC 54W 840 30D ONOFF	4062172083195	Neutral White	AC	220-240	54	50	30	4000	4590	275	200
AS WS M AC 54W 830 60D ONOFF	4062172083300	Warm White	AC	220-240	54	50	60	3000	4320	275	200
AS WS M AC 54W 840 60D ONOFF	4062172083225	Neutral White	AC	220-240	54	50	60	4000	4590	275	200
AS WS M AC 54W RGB 30D DMX	4062172083317	RGB	AC	220-240	54	50	30	-	1890	275	200
AS WS M AC 54W RGB 60D DMX	4062172083324	RGB	AC	220-240	54	50	60	-	1890	275	200
AS WS M AC 54W RGBW40 30D DMX	4062172083331	RGBW	AC	220-240	54	50	30	-	2430	275	200
AS WS M AC 54W RGBW40 60D DMX	4062172083348	RGBW	AC	220-240	54	50	60	-	2430	275	200
AS WS M AC 90W 830 10D ONOFF	4062172083355	Warm White	AC	220-240	90	50	10	3000	7200	275	200
AS WS M AC 90W 840 10D ONOFF	4062172083232	Neutral White	AC	220-240	90	50	10	4000	7650	275	200
AS WS M AC 90W 830 30D ONOFF	4062172083362	Warm White	AC	220-240	90	50	30	3000	7200	275	200
AS WS M AC 90W 840 30D ONOFF	4062172083249	Neutral White	AC	220-240	90	50	30	4000	7650	275	200
AS WS M AC 90W 830 60D ONOFF	4062172083379	Warm White	AC	220-240	90	50	60	3000	7200	275	200
AS WS M AC 90W 840 60D ONOFF	4062172083256	Neutral White	AC	220-240	90	50	60	4000	7650	275	200
AS WS M AC 90W RGB 30D DMX	4062172083386	RGB	AC	220-240	90	50	30	-	2940	275	200
AS WS M AC 90W RGB 60D DMX	4062172083393	RGB	AC	220-240	90	50	60	-	2940	275	200
AS WS M AC 90W RGBW40 30D DMX	4062172083522	RGBW	AC	220-240	90	50	30	-	4050	275	200
AS WS M AC 90W RGBW40 60D DMX	4062172083515	RGBW	AC	220-240	90	50	60	-	4050	275	200
AS WS L AC 150W 830 10D ONOFF	4062172083409	Warm White	AC	220-240	150	50	10	3000	12000	348	185
AS WS L AC 150W 840 10D ONOFF	4062172083263	Neutral White	AC	220-240	150	50	10	4000	12660	348	185
AS WS L AC 150W 830 30D ONOFF	4062172083539	Warm White	AC	220-240	150	50	30	3000	12000	348	185
AS WS L AC 150W 840 30D ONOFF	4062172083645	Neutral White	AC	220-240	150	50	30	4000	12660	348	185
AS WS L AC 150W 830 60D ONOFF	4062172083911	Warm White	AC	220-240	150	50	60	3000	12000	348	185
AS WS L AC 150W 840 60D ONOFF	4062172083928	Neutral White	AC	220-240	150	50	60	4000	12660	348	185
AS WS L AC 150W RGB 10D DMX	4062172083942	RGB	AC	220-240	150	50	10	-	5250	348	185
AS WS L AC 150W RGB 30D DMX	4062172083805	RGB	AC	220-240	150	50	30	-	5250	348	185
AS WS L AC 150W RGB 60D DMX	4062172083959	RGB	AC	220-240	150	50	60	-	5250	348	185
AS WS L AC 150W RGBW40 10D DMX	4062172083966	RGBW	AC	220-240	150	50	10	-	6525	348	185
AS WS L AC 150W RGBW40 30D DMX	4062172084024	RGBW	AC	220-240	150	50	30	-	6525	348	185
AS WS L AC 150W RGBW40 60D DMX	4062172084031	RGBW	AC	220-240	150	50	60	-	6525	348	185
AS WS XL AC 150W 830 4D5 ONOFF	4062172084048	Warm White	AC	220-240	150	50	4.5	3000	12000	398	206
AS WS XL AC 150W 840 4D5 ONOFF	4062172083874	Neutral White	AC	220-240	150	50	4.5	4000	12660	398	206
AS WS XL AC 180W 830 10D ONOFF	4062172083881	Warm White	AC	220-240	180	50	10	3000	14400	398	206
AS WS XL AC 180W 840 10D ONOFF	4062172083980	Neutral White	AC	220-240	180	50	10	4000	15300	398	206
AS WS XL AC 180W 830 30D ONOFF	4062172083997	Warm White	AC	220-240	180	50	30	3000	14400	398	206
AS WS XL AC 180W 840 30D ONOFF	4062172083898	Neutral White	AC	220-240	180	50	30	4000	15300	398	206
AS WS XL AC 180W 830 60D ONOFF	4062172083904	Warm White	AC	220-240	180	50	60	3000	14400	398	206
AS WS XL AC 180W 840 60D ONOFF	4062172084000	Neutral White	AC	220-240	180	50	60	4000	15300	398	206
AS WS XL AC 180W RGB 10D DMX	4062172084017	RGB	AC	220-240	180	50	10	-	6300	398	206
AS WS XL AC 180W RGB 30D DMX	4062172084055	RGB	AC	220-240	180	50	30	-	6300	398	206
AS WS XL AC 180W RGB 60D DMX	4062172084062	RGB	AC	220-240	180	50	60	-	6300	398	206
AS WS XL AC 180W RGBW40 10D DMX	4062172084079	RGBW	AC	220-240	180	50	10	-	8100	398	206
AS WS XL AC 180W RGBW40 30D DMX	4062172083935	RGBW	AC	220-240	180	50	30	-	8100	398	206
AS WS XL AC 180W RGBW40 60D DMX	4062172084086	RGBW	AC	220-240	180	50	60	-	8100	398	206
Accessory (For AC Version)											
AS WS 4-pin Interconnection Cable 1m	4062172057516										
AS WS 4-pin Connector Socket End Cap	4062172057530										
AS WS 4-pin DATA Starter Cable 2m	4062172057554										

Technical data subject to variation and change without notice.

Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com

www.traxontechnologies.com



OSRAM copyrights reserved 2019. Subject to change without notice. Errors and omission excepted. All images used are for illustrative purposes only and not intended to reflect actual product performance.