



Product Highlights:

- Available in clear view or diffused view
- Slim profile (1" / 25 mm) for façade integration
- 10 pixels per 1.2 meters / 2.5 pixels per foot

Light is spectacular

Media Tube® Go

A slim, direct view luminaire designed for all budgets to integrate into any wall, façade or media lighting application.

Light is OSRAM

Our Brands

traxon e:cue

OSRAM

Media Tube® Go



Media Tube® Go is a slim, direct view luminaire designed for all budgets to integrate into any wall, façade or media lighting application with tight installation requirements. Available in Clear View or Diffused View and 10 pixels per 1.2 meters / 2.5 pixels per foot, the Media Tube® Go ensures smooth effects along your facade, media application or bridge.

Advantages & Benefits


- Available in clear view or diffused view
- Slim profile (1" / 25 mm) for façade integration
- 10 pixels per 1.2 meters / 2.5 pixels per foot
- Color options: RGBW and Dynamic White (2200-6500K)
- IP67 & IK08
- Suitable for coastal environments
- ANSI 3G vibration rated

Applications

- Accent/border dynamic effect
- Low resolution media façade
- Stadiums, Bridges, Hospitality, Office Buildings




Dimensions

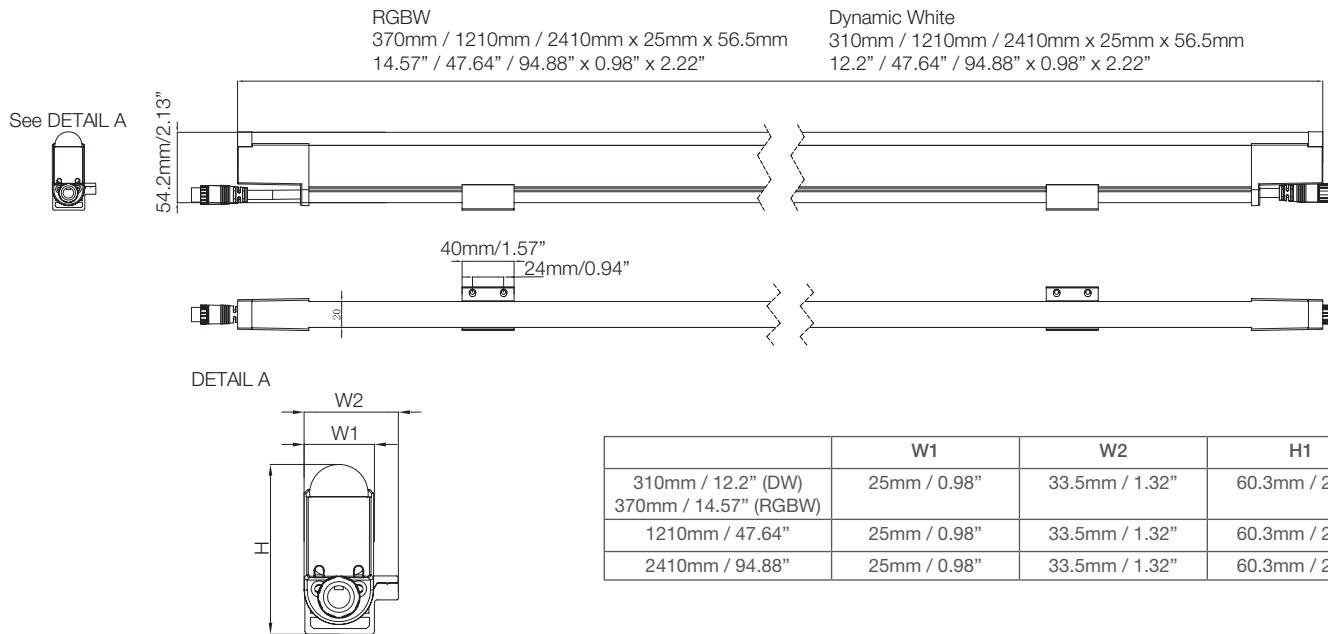


Photometrics



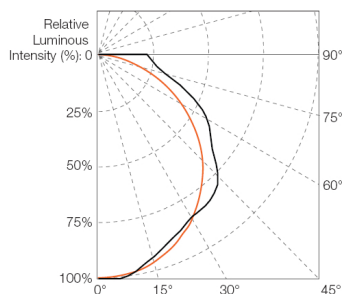

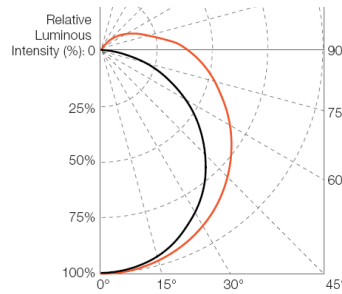





Clear View



Diffused View



Media Tube® Go

Product Reference	IC										
Fixture											
MEDIA TUBE GO DIFFUSED 2410 RGBW 20PXL	AM463610055	RGBW	DC	24	30	110° x 170°	399	2410mm 94.9"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO DIFFUSED 1210 RGBW 10PXL	AM463620055	RGBW	DC	24	15	110° x 170°	200	1210mm 47.6"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO DIFFUSED 370 RGBW 3PXL	AM463630055	RGBW	DC	24	4.5	110° x 170°	60	370mm 14.6"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO CLEAR 2410 RGBW 20PXL	AM463640055	RGBW	DC	24	30	120°	1174	2410mm 94.9"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO CLEAR 1210 RGBW 10PXL	AM463650055	RGBW	DC	24	15	120°	587	1210mm 47.6"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO CLEAR 370 RGBW 3PXL	AM463660055	RGBW	DC	24	4.5	120°	176	370mm 14.6"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO DIFFUSED 2410 DW 24PXL	AM463670055	Dynamic White	DC	24	30	110° x 170°	712	2410mm 94.9"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO DIFFUSED 1210 DW 12PXL	AM463680055	Dynamic White	DC	24	15	110° x 170°	356	1210mm 47.6"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO DIFFUSED 310 DW 3PXL	AM463690055	Dynamic White	DC	24	3.8	110° x 170°	89	310mm 12.2"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO CLEAR 2410 DW 24PXL	AM463700055	Dynamic White	DC	24	30	120°	2181	2410mm 94.9"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO CLEAR 1210 DW 12PXL	AM463710055	Dynamic White	DC	24	15	120°	1091	1210mm 47.6"	25mm 1"	56.5mm 2.2"	DMX512
MEDIA TUBE GO CLEAR 310 DW 3PXL	AM463720055	Dynamic White	DC	24	3.8	120°	273	310mm 12.2"	25mm 1"	56.5mm 2.2"	DMX512
Accessories											
MEDIA TUBE GO STARTER CABLE, 5-WIRE, 1M	AM463750055										
MEDIA TUBE GO STARTER CABLE, 5-WIRE, 3M	AM463760055										
MEDIA TUBE GO END CAP, 120Ω TERMINATOR	AM463770055										
MEDIA TUBE GO INTER CABLE, 5-WIRE, 0.14M	AM463780055										
MEDIA TUBE GO INTER CABLE, 5-WIRE, 1M	AM463790055										
MEDIA TUBE GO INTER CABLE, 5-WIRE, 3M	AM463800055										
MEDIA TUBE GO POWER INJECTOR CABLE	AM463810055										
MEDIA TUBE GO RJ45 STARTER CABLE	AM463820055										
TX SMART ADDRESSER	AM438260055										

Technical data subject to variation and change without notice.

Traxon e:cue

Sales enquiry: info@traxontechnologies.com / Information.Traxon@traxontechnologies.com
www.traxontechnologies.com / www.osram.us/traxon