

# SYMPL essential2 Node



## e:cue SYMPL essential2 Node

The SYMPL essential2 Node is an eight-channel DMX interface for use with e:cue's lighting control solutions SYMPHOLIGHT and LAS. It provides an interfaces for up to 4096 DMX channels split into 8 universes with each 512 channels (DMX512 with SYMPHOLIGHT or LAS). Connection to the server runs via Ethernet interface with 100 Mbit/s. The SYMPL essential2 Node can be powered by an external power supply or via Power-over-Ethernet (PoE). It is easily mounted on standard 35 mm DIN rails, or with key holes in the housing base.

## Highlights

- 8 ports (universes) for DMX
- Power-over-Ethernet
- High operating temperature: -30 ... 55 °C
- Isolated DMX outputs
- Surge protection (DMX side)
- Reverse polarity protection
- Test mode via button and web interface
- Integration in e:cue SYMPHOLIGHT and LAS
- Web interface for status and configuration

## e:cue Interfaces

Lighting applications are heterogenous by nature. e:cue interfaces serve to integrate many networks, protocols and third party products into e:cue solutions. They also aid in applying special control functions for fixtures, they integrate analog or mechanical signaling into the digital world and offer bridging functions. e:cue interfaces are the links to bring together the many techniques and technologies of lighting control.

## Delivery scope

- e:cue SYMPL essential2 Node
- Safety instructions
- Installation guide
- 8 x 3-pin DMX terminal plug
- 3-pin Power terminal plug

## Identcode

AM466930031

## Optional accessories

- Power supply 15W 24V DIN rail

AM1884100HA

## Product specifications




Dimensions (W x H x D)	143 x 92 x 62 mm / 5.63 x 3.6 x 2.4 in (excl. fastening clip)
Weight	250 g / 0.55 lb
Power supply input	12 ... 24 V DC terminal plug (5.08 mm pitch) wire gauge: 0.2 - 3.3 mm <sup>2</sup> reverse polarity protection or PoE IEEE 802.3af on RJ45
Power consumption	max. 3.5 W (incl. DMX termination)
Operating temperature	-30 ... 55 °C / -22 ... 131 °F
Storage temperature	-40 ... 70 °C / -40 ... 158 °F
Operating / storage humidity	0 ... 80% RH, non-condensing
Protection class	IP20
Electrical safety class	SELV
Housing	Self extinguishing blend PC/ABS, UL E140692
Mounting	on 35 mm DIN rail (EN 60715), or with key hole on any stable vertical surface
Certificates	CE, UKCA

## Interface specifications

Output interfaces	8 x DMX short circuit protected surge protection isolated in pairs 3-pin terminal plug (3.5 mm pitch) wire gauge: 0.08 ... 1.31 mm <sup>2</sup>
Ethernet-Port	1 x e:net 10/100 Mbit/s, RJ45
User interfaces	LEDs for Ethernet activity, device status, DMX status, error; Identify button; Test button; web interface for configuration

## Dimensions

All measures in mm

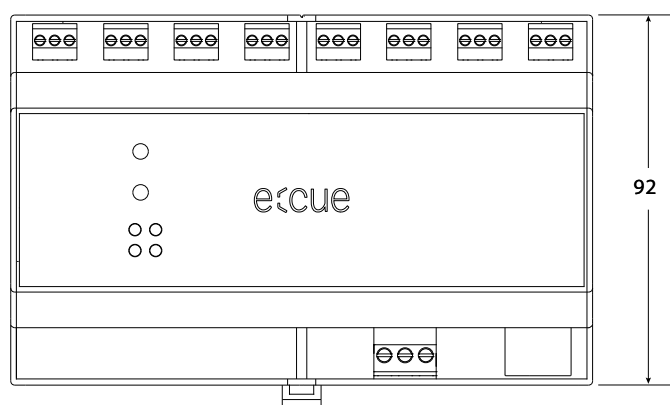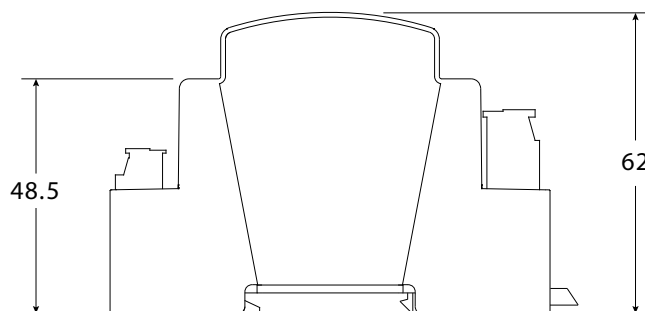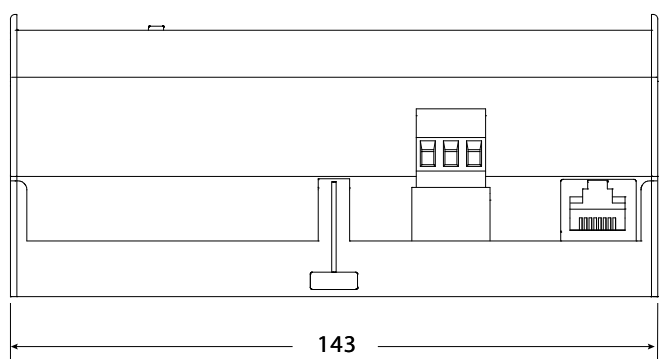

TRAXON | e:cue