




# TRAXON Go<sup>+</sup>

## Linear Go Mini White On / Off

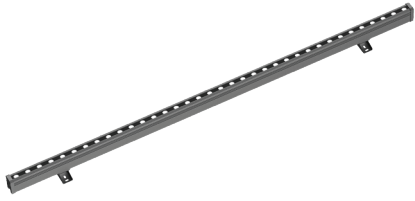

Project: \_\_\_\_\_

Type: \_\_\_\_\_



IP66



COAST



On / Off



ANSI 3G





IK06

The Traxon Linear Go Mini is a DC line powered exterior luminaire used to distinguish facades, walls, and architectural landmarks with a powerful, even color wash effect. Linear Go's high-value design features efficient electrical and optical systems, making it ideal for budget-conscious projects.

### Features

- On / Off control
- Easy installation and maintenance

### Dimensions

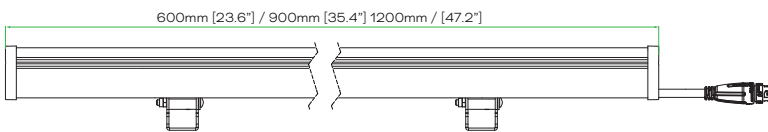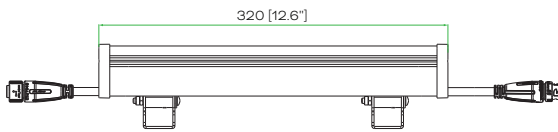


### Technologies

- On / Off control

### Color Options



### Beam Angle

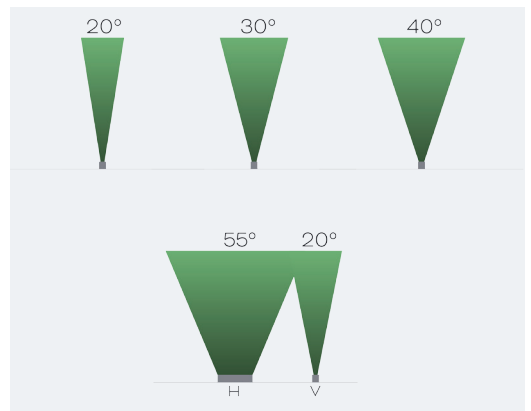

### Finish



Traxon Signature Gray: RAL7005

### Product Specifications

	Linear Go Mini White On / Off			
Model	320mm / 12.6"	600mm / 23.6"	900mm / 35.4"	1200mm / 47.2"
Light Source	White LED			
Color Range	White 2700K, 3000K, 4000K, 5700K, 6500K			
LED Quantity	9pcs	18pcs	27pcs	36pcs
Luminous Flux (4.5W per 300mm / 1ft) (3.4W per 300mm / 1ft)	White 4000K: 405 lm (30°) White 4000K: 306 lm (30°)	White 4000K: 810 lm (30°) White 4000K: 612 lm (30°)	White 4000K: 1215 lm (30°) White 4000K: 918 lm (30°)	White 4000K: 1620 lm (30°) White 4000K: 1224 lm (30°)
Efficacy	White 4000K: 90 lm/W (full on 30°)			
Beam Angles	20°, 30°, 40°, 55° x 20°			
Lens	Glass			
Housing	Aluminum			
Housing Finish Options	Traxon Signature Gray (RAL7005)			
Adjustment Options	-30° to +90°			
Mounting	Mounting Bracket			
Dimensions (L x W x H, Mounting Bracket included)	320mm x 30mm x 77.1mm 12.6" x 1.2" x 3.0"	600mm x 30mm x 77.1mm 23.6" x 1.2" x 3.0"	900mm x 30mm x 77.1mm 35.4" x 1.2" x 3.0"	1200mm x 30mm x 77.1mm 47.2" x 1.2" x 3.0"
Weight	0.69kg / 1.52lbs	0.99kg / 2.18lbs	1.30kg / 2.87lbs	1.65kg / 3.64lbs
Regulatory Listing & Safety Approval	CE, UKCA, cETLus, FCC, ANSI C136.31-3G			
Operating Temperature	-30°C to +50°C (-22°F to +122°F)			
Minimum Starting Temperature	-20°C (-4°F)			
Storage Temperature	-40°C to +80°C (-40°F to +176°F)			
Environment	Outdoor, IP66, IK06, Coastal Environment (ASTM B117-16)			
Humidity	85%, non-condensing			

### Electrical Specifications

Input Voltage	24V DC			
	4.5W per 300mm / 1ft			
Power Consumption	4.5W	9W	13.5W	18W
	3.4W per 300mm / 1ft (3.4W per foot model meets ASHRAE 90.1-2022 Zone 3 requirements)			
	3.4W			13.6W
Lumen Maintenance	L70 50000hrs @ 25°C			

### System Specifications

Power Supply	CE market: LED Engine 24V ETL market: LED Engine 24V (Class 2)
Control	On / Off

**LED CHARACTERISTICS** Because LEDs are semiconductor devices, their performances are subject to inherent variability commonly found in semiconductor industry. To improve consistency in performance across the same product, LED manufacturers "sort" LEDs into bins according to different preset parameters, such as forward driving voltage, illumination, etc. Whereas binning is a sorting function, it is not a correction process. Inherent variability in the manufacturing process results always in different binning distributions according to different production lots. Traxon uses automatically binned LEDs on its products, thereby minimizing output variations within the model range.

As with all electronic devices, LED output degrades over time – a term called lumen depreciation. This also explains why it is nearly impossible to expect photometric performances of two LED products with different service life spans to be the same. The rate of LED degrade is a complicate function of many factors such as operating efficiency, duration of continuous operation, and more significantly, environmental conditions (ambient temperature for example). If allowed working under optimal operating temperature range and with good ventilation, LED devices enjoy long service lives over conventional light sources. When using/installing LED devices, care should be taken to ensure that the devices will operate within the operating conditions specified in respective product literature.


Lumen measurement complies with LM-79-08 standard.  
Lumen maintenance is calculated based on LM-80 compliant measurement.

### Source Specifications

Source	White LED
Optics	20°

### Candela Distribution

### Light Output (4.5W per 300mm / 1ft)

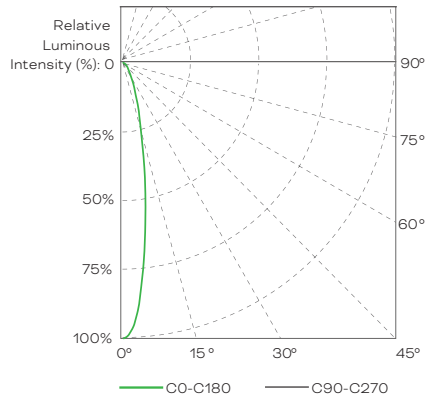

	Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
320mm / 12.6"	3000K	360	1799	80
	4000K	405	2023	90
600mm / 23.6"	3000K	720	3597	80
	4000K	810	4047	90
900mm / 35.4"	3000K	1080	5396	80
	4000K	1215	6070	90
1200mm / 47.2"	3000K	1440	7195	80
	4000K	1620	8094	90

### Illuminance at a Distance (4.5W per 300mm / 1ft)

	Center Beam LUX/klm	Beam Width	
0.5m	19781	0.16m / 0.5'	1.6'
1m	4945	0.32m / 1'	3.3'
1.5m	2198	0.48m / 1.6'	4.9'
2.0m	1236	0.63m / 2.1'	6.6'
2.5m	791	0.79m / 2.6'	8.2'
3m	549	0.95m / 3.1'	9.8'


For fc divide by 10.7 ■ Horiz.Spread: 18.0°  
 IES and LDT files are available for download from the Traxon website.

Color	Distance	320mm / 12.6"		600mm / 23.6"		900mm / 35.4"		1200mm / 47.2"	
		Illuminance		Illuminance		Illuminance		Illuminance	
		LUX	FC	LUX	FC	LUX	FC	LUX	FC
3000K	0.5m / 1.6'	7121.2	665.5	14242.3	1331.1	21363.5	1996.6	28484.6	2662.1
	1m / 3.3'	1780.2	166.4	3560.4	332.7	5340.6	499.1	7120.8	665.5
	1.5m / 4.9'	791.3	74	1582.6	147.9	2373.8	221.9	3165.1	295.8
	2m / 6.6'	445	41.6	889.9	83.2	1334.9	124.8	1779.8	166.3
	2.5m / 8.2'	284.8	26.6	569.5	53.2	854.3	79.8	1139	106.4
	3m / 9.8'	197.6	18.5	395.3	36.9	592.9	55.4	790.6	73.9
4000K	0.5m / 1.6'	8011.3	748.7	16022.6	1497.4	24033.9	2246.2	32045.2	2994.9
	1m / 3.3'	2002.7	187.2	4005.5	374.3	6008.2	561.5	8010.9	748.7
	1.5m / 4.9'	890.2	83.2	1780.4	166.4	2670.6	249.6	3560.8	332.8
	2m / 6.6'	500.6	46.8	1001.2	93.6	1501.7	140.3	2002.3	187.1
	2.5m / 8.2'	320.4	30	640.7	59.9	961.1	89.8	1281.4	119.8
	3m / 9.8'	222.3	20.8	444.7	41.6	667	62.3	889.4	83.1

### Source Specifications

Source	White LED
Optics	30°

### Candela Distribution

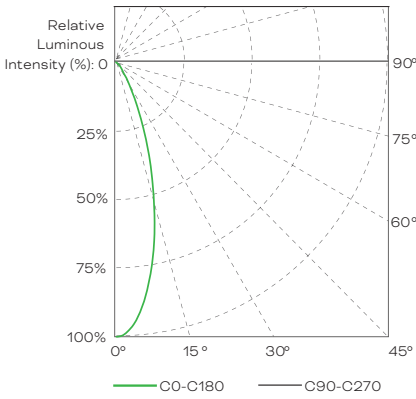

### Light Output (4.5W per 300mm / 1ft)

	Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
320mm / 12.6"	3000K	360	948	80
	4000K	405	1066	90
600mm / 23.6"	3000K	720	1895	80
	4000K	810	2132	90
900mm / 35.4"	3000K	1080	2843	80
	4000K	1215	3198	90
1200mm / 47.2"	3000K	1440	3790	80
	4000K	1620	4264	90

### Illuminance at a Distance (4.5W per 300mm / 1ft)

	Center Beam LUX/klm	Beam Width	
0.5m	10386	0.28m / 0.9'	1.6'
1m	2596	0.57m / 1.9'	3.3'
1.5m	1154	0.85m / 2.8'	4.9'
2.0m	649	1.14m / 3.7'	6.6'
2.5m	415	1.42m / 4.7'	8.2'
3m	288	1.71m / 5.6'	9.8'

For fc divide by 10.7

■ Horiz. Spread: 31.8°


IES and LDT files are available for download from the Traxon website.

Color	Distance	320mm / 12.6"		600mm / 23.6"		900mm / 35.4"		1200mm / 47.2"	
		Illuminance		Illuminance		Illuminance		Illuminance	
		LUX	FC	LUX	FC	LUX	FC	LUX	FC
3000K	0.5m / 1.6'	3739	349.4	7477.9	698.9	11216.9	1048.3	14955.8	1397.7
	1m / 3.3'	934.6	87.3	1869.1	174.7	2803.7	262	3738.2	349.4
	1.5m / 4.9'	415.4	38.8	830.9	77.7	1246.3	116.5	1661.8	155.3
	2m / 6.6'	233.6	21.8	467.3	43.7	700.9	65.5	934.6	87.3
	2.5m / 8.2'	149.4	14	298.8	27.9	448.2	41.9	597.6	55.9
	3m / 9.8'	103.7	9.7	207.4	19.4	311	29.1	414.7	38.8
4000K	0.5m / 1.6'	4206.3	393.1	8412.7	786.2	12619	1179.3	16825.3	1572.5
	1m / 3.3'	1051.4	98.3	2102.8	196.5	3154.1	294.8	4205.5	393
	1.5m / 4.9'	467.4	43.7	934.7	87.4	1402.1	131	1869.5	174.7
	2m / 6.6'	262.8	24.6	525.7	49.1	788.5	73.7	1051.4	98.3
	2.5m / 8.2'	168.1	15.7	336.2	31.4	504.2	47.1	672.3	62.8
	3m / 9.8'	116.6	10.9	233.3	21.8	349.9	32.7	466.6	43.6

### Source Specifications

Source	White LED
Optics	40°

### Candela Distribution

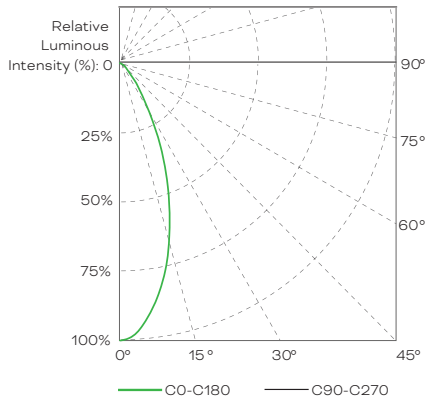

### Light Output (4.5W per 300mm / 1ft)

	Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
320mm / 12.6"	3000K	360	623	80
	4000K	405	700	90
600mm / 23.6"	3000K	720	1245	80
	4000K	810	1401	90
900mm / 35.4"	3000K	1080	1868	80
	4000K	1215	2101	90
1200mm / 47.2"	3000K	1440	2490	80
	4000K	1620	2801	90


### Illuminance at a Distance (4.5W per 300mm / 1ft)

	Center Beam LUX/klm	Beam Width	
0.5m	6762	0.38m / 1.2'	1.6'
1m	1691	0.75m / 2.5'	3.3'
1.5m	751	1.13m / 3.7'	4.9'
2.0m	423	1.5m / 4.9'	6.6'
2.5m	270	1.88m / 6.2'	8.2'
3m	188	2.26m / 7.4'	9.8'

For fc divide by 10.7      Horiz.Spread: 41.2°  
 IES and LDT files are available for download from the Traxon website.

Color	Distance	320mm / 12.6"		600mm / 23.6"		900mm / 35.4"		1200mm / 47.2"	
		Illuminance		Illuminance		Illuminance		Illuminance	
		LUX	FC	LUX	FC	LUX	FC	LUX	FC
3000K	0.5m / 1.6'	2434.3	227.5	4868.6	455	7303	682.5	9737.3	910
	1m / 3.3'	608.8	56.9	1217.5	113.8	1826.3	170.7	2435	227.6
	1.5m / 4.9'	270.4	25.3	540.7	50.5	811.1	75.8	1081.4	101.1
	2m / 6.6'	152.3	14.2	304.6	28.5	456.8	42.7	609.1	56.9
	2.5m / 8.2'	97.2	9.1	194.4	18.2	291.6	27.3	388.8	36.3
	3m / 9.8'	67.7	6.3	135.4	12.7	203	19	270.7	25.3
4000K	0.5m / 1.6'	2738.6	255.9	5477.2	511.9	8215.8	767.8	10954.4	1023.8
	1m / 3.3'	684.9	64	1369.7	128	2054.6	192	2739.4	256
	1.5m / 4.9'	304.2	28.4	608.3	56.9	912.5	85.3	1216.6	113.7
	2m / 6.6'	171.3	16	342.6	32	513.9	48	685.3	64
	2.5m / 8.2'	109.4	10.2	218.7	20.4	328.1	30.7	437.4	40.9
	3m / 9.8'	76.1	7.1	152.3	14.2	228.4	21.3	304.6	28.5


#### Fixture Dimensions

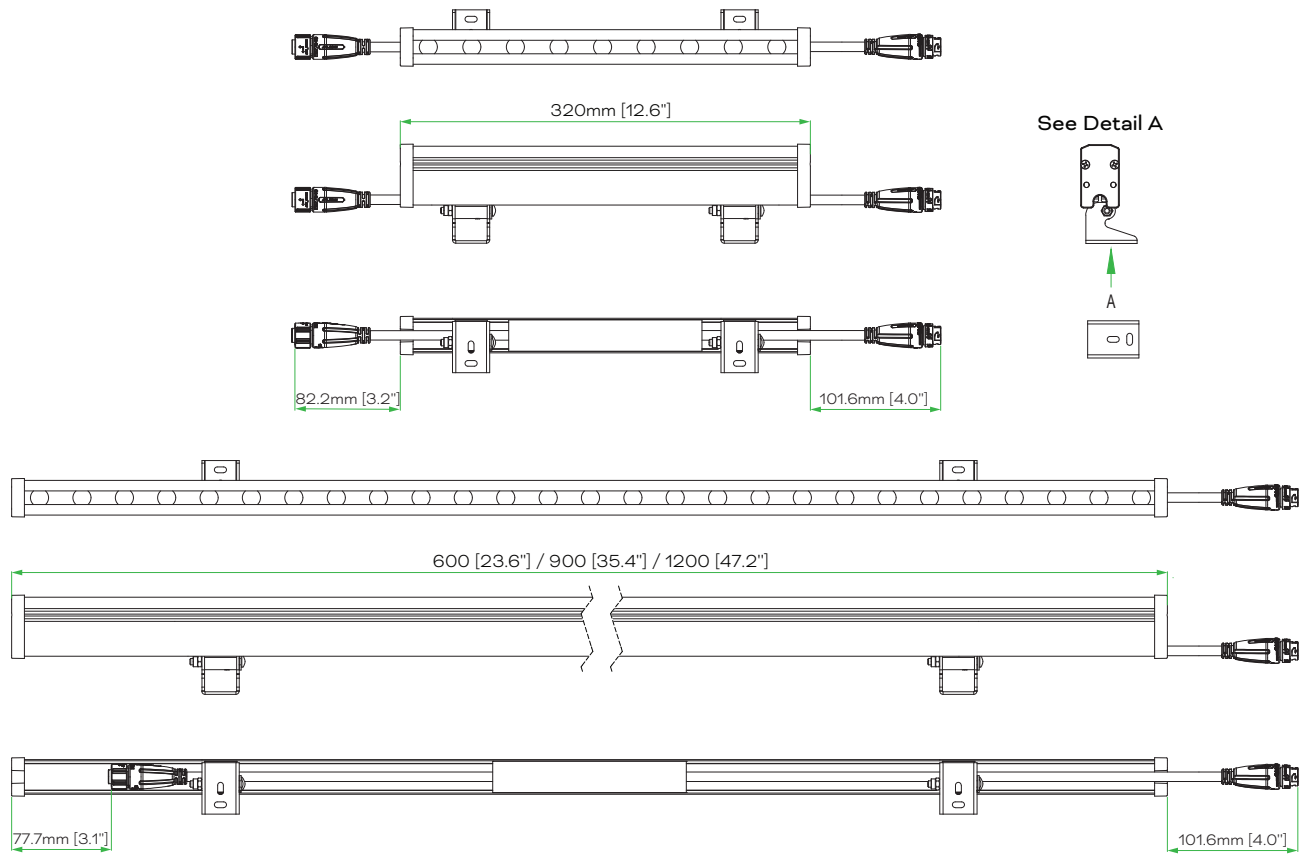


See Detail A



#### Detail A

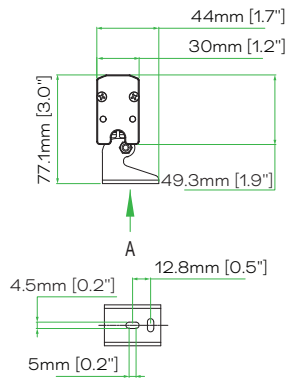


Indicator diagram of installation hole in A surface

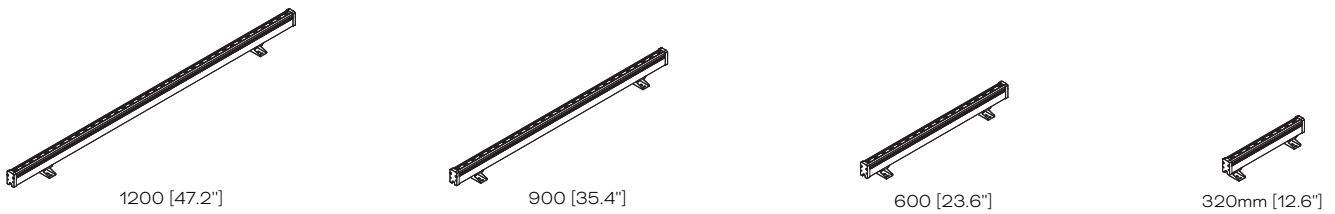

#### Bracket Mounting


##### 1 Fix the brackets and fixture fixing surface

4mm screwdriver  
(by others)

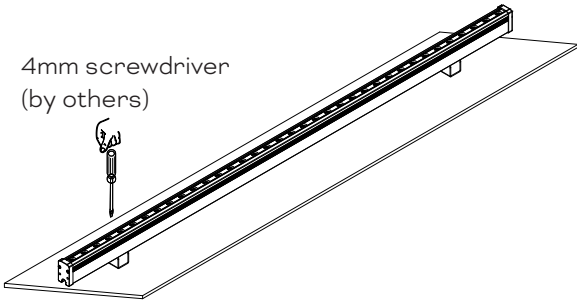


##### 2 Loosen the bolts

3mm hex key (by others)  
7mm spanner (by others)

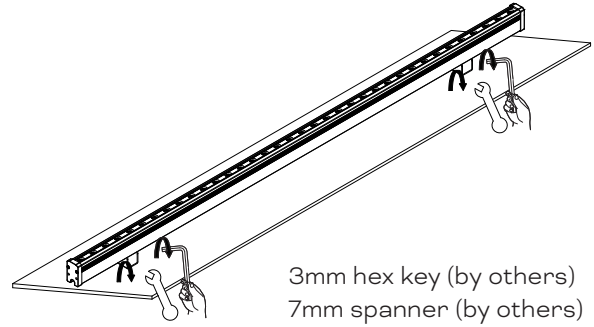



##### 3 Adjust the fixture to desired angle

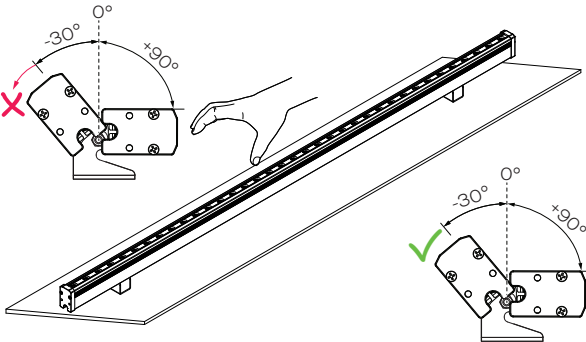

##### 4 Fix the fixture with its desired angle

3mm hex key (by others)  
7mm spanner (by others)

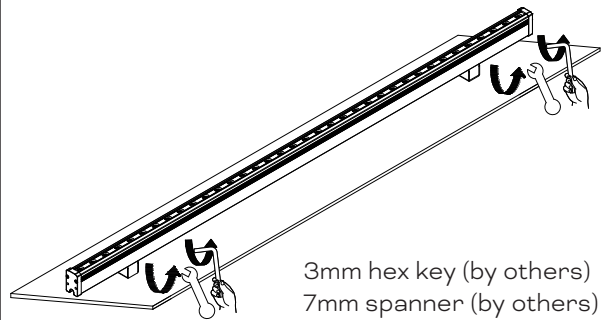

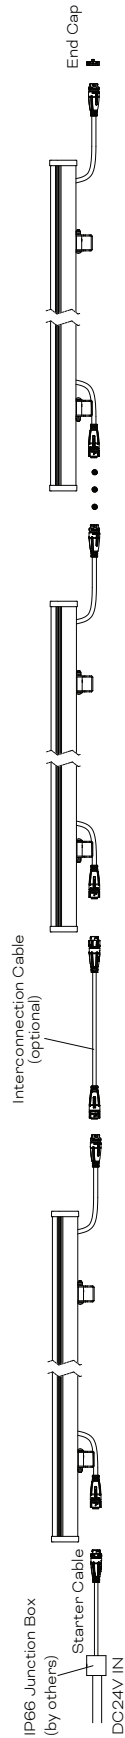

Function	Wire Size	Color	Connection
DC24V+	1.0mm <sup>2</sup>	Black	DC24V+
DC24V-	1.0mm <sup>2</sup>	White	DC24V- & GND

-

Maximum number of fixture per input power line cannot exceed total wattage of 168W (CE), and 100W (US Class 2 PSU):  
 Linear Go mini 320mm / 12.6": 4.5W or 3.4W  
 Linear Go mini 600mm / 23.6": 9W or 6.8W  
 Linear Go mini 900mm / 35.4": 13.5W or 10.2W  
 Linear Go mini 1200mm / 47.2": 18W or 13.6W

**Note: 3.4W or 4.5W per 300mm / 1ft.**  
**3.4W per foot model meets ASHRAE 90.1-2022 Zone 3 requirements.**

Example:

Fixture daisy chain		
Voltage	Fixture Total Power Consumption *	Max Number of fixtures
24V DC (CE)	162W	e.g. 9pcs 1200mm (18W) per PSU input chain
24V DC (ETL) with Class 2 PSU	85.5W	e.g. 4pcs 1200mm (18W) + 3pcs 320mm (4.5W) per PSU input chain

Maximum number of fixtures is based on minimal interconnection lengths fixture to fixture.  
 Actual number of fixtures is dependent on cable interconnection lengths. The number of fixtures will reduce if longer cable lengths are used. Please consult regional sales office to confirm maximums.

\* Consider some Power Supply Unit (PSU) wattage buffer for total power consumption



### Fixtures Model Number

XB	.	LG	.	1		NN	N	N	N	0	3	0	00
						Housing + Voltage	Wattage (Power)	LED	Optics	Length	Control	Approbation	Add on
						1 - Mini DC	04: 3.4W	B: 2700K	2: 20°	1: 320mm / 12.6"	On / Off	CE & ETL	0: Without GS
							05: 4.5W	C: 3000K	4: 30°	3: 600mm / 23.6"			
							07: 6.8W	E: 4000K	B: 40°	4: 900mm / 35.4"			
							09: 9W	H: 5700K	D: 55° x 20°	6: 1200mm / 47.2"			
							11: 10.2W	I: 6500K					
							14: 13.5W						
							14: 13.6W						
							18: 18W						

### Desired Model Number:

XB	.	LG	.	1						0	3	0	00
----	---	----	---	---	--	--	--	--	--	---	---	---	----

### Fixtures (4.5W per 300mm / 1ft)

Model No.	Description	Item Code
XB.LG.105B2103000	LINEAR GO MINI DC 4.5W 2700K 20° 320 ON/OFF	DL23100335955
XB.LG.109B2303000	LINEAR GO MINI DC 9W 2700K 20° 600 ON/OFF	DL23100336055
XB.LG.114B2403000	LINEAR GO MINI DC 13.5W 2700K 20° 900 ON/OFF	DL23100336155
XB.LG.118B2603000	LINEAR GO MINI DC 18W 2700K 20° 1200 ON/OFF	DL23100336255
XB.LG.105B4103000	LINEAR GO MINI DC 4.5W 2700K 30° 320 ON/OFF	DL23100336555
XB.LG.109B4303000	LINEAR GO MINI DC 9W 2700K 30° 600 ON/OFF	DL23100336655
XB.LG.114B4403000	LINEAR GO MINI DC 13.5W 2700K 30° 900 ON/OFF	DL23100336755
XB.LG.118B4603000	LINEAR GO MINI DC 18W 2700K 30° 1200 ON/OFF	DL23100336855
XB.LG.105BB103000	LINEAR GO MINI DC 4.5W 2700K 40° 320 ON/OFF	DL23100337155
XB.LG.109BB303000	LINEAR GO MINI DC 9W 2700K 40° 600 ON/OFF	DL23100337255
XB.LG.114BB403000	LINEAR GO MINI DC 13.5W 2700K 40° 900 ON/OFF	DL23100337355
XB.LG.118BB603000	LINEAR GO MINI DC 18W 2700K 40° 1200 ON/OFF	DL23100337455
XB.LG.105BD103000	LINEAR GO MINI DC 4.5W 2700K 55°x20° 320 ON/OFF	DL23100337755
XB.LG.109BD303000	LINEAR GO MINI DC 9W 2700K 55°x20° 600 ON/OFF	DL23100337855
XB.LG.114BD403000	LINEAR GO MINI DC 13.5W 2700K 55°x20° 900 ON/OFF	DL23100337955
XB.LG.118BD603000	LINEAR GO MINI DC 18W 2700K 55°x20° 1200 ON/OFF	DL23100338055
XB.LG.105C2103000	LINEAR GO MINI DC 4.5W 3000K 20° 320 ON/OFF	DL23100338355
XB.LG.109C2303000	LINEAR GO MINI DC 9W 3000K 20° 600 ON/OFF	DL23100338455
XB.LG.114C2403000	LINEAR GO MINI DC 13.5W 3000K 20° 900 ON/OFF	DL23100338555
XB.LG.118C2603000	LINEAR GO MINI DC 18W 3000K 20° 1200 ON/OFF	DL23100338655
XB.LG.105C4103000	LINEAR GO MINI DC 4.5W 3000K 30° 320 ON/OFF	DL23100338955
XB.LG.109C4303000	LINEAR GO MINI DC 9W 3000K 30° 600 ON/OFF	DL23100339055
XB.LG.114C4403000	LINEAR GO MINI DC 13.5W 3000K 30° 900 ON/OFF	DL23100339155
XB.LG.118C4603000	LINEAR GO MINI DC 18W 3000K 30° 1200 ON/OFF	DL23100339255
XB.LG.105CB103000	LINEAR GO MINI DC 4.5W 3000K 40° 320 ON/OFF	DL23100339555
XB.LG.109CB303000	LINEAR GO MINI DC 9W 3000K 40° 600 ON/OFF	DL23100339655
XB.LG.114CB403000	LINEAR GO MINI DC 13.5W 3000K 40° 900 ON/OFF	DL23100339755
XB.LG.118CB603000	LINEAR GO MINI DC 18W 3000K 40° 1200 ON/OFF	DL23100339855
XB.LG.105CD103000	LINEAR GO MINI DC 4.5W 3000K 55°x20° 320 ON/OFF	DL23100340155
XB.LG.109CD303000	LINEAR GO MINI DC 9W 3000K 55°x20° 600 ON/OFF	DL23100340255
XB.LG.114CD403000	LINEAR GO MINI DC 13.5W 3000K 55°x20° 900 ON/OFF	DL23100340355
XB.LG.118CD603000	LINEAR GO MINI DC 18W 3000K 55°x20° 1200 ON/OFF	DL23100340455

### Fixtures (4.5W per 300mm / 1ft)

Model No.	Description	Item Code
XB.LG.105E2103000	LINEAR GO MINI DC 4.5W 4000K 20° 320 ON/OFF	DL23100340755
XB.LG.109E2303000	LINEAR GO MINI DC 9W 4000K 20° 600 ON/OFF	DL23100340855
XB.LG.114E2403000	LINEAR GO MINI DC 13.5W 4000K 20° 900 ON/OFF	DL23100340955
XB.LG.118E2603000	LINEAR GO MINI DC 18W 4000K 20° 1200 ON/OFF	DL23100341055
XB.LG.105E4103000	LINEAR GO MINI DC 4.5W 4000K 30° 320 ON/OFF	DL23100341355
XB.LG.109E4303000	LINEAR GO MINI DC 9W 4000K 30° 600 ON/OFF	DL23100341455
XB.LG.114E4403000	LINEAR GO MINI DC 13.5W 4000K 30° 900 ON/OFF	DL23100341555
XB.LG.118E4603000	LINEAR GO MINI DC 18W 4000K 30° 1200 ON/OFF	DL23100341655
XB.LG.105EB103000	LINEAR GO MINI DC 4.5W 4000K 40° 320 ON/OFF	DL23100341955
XB.LG.109EB303000	LINEAR GO MINI DC 9W 4000K 40° 600 ON/OFF	DL23100342055
XB.LG.114EB403000	LINEAR GO MINI DC 13.5W 4000K 40° 900 ON/OFF	DL23100342155
XB.LG.118EB603000	LINEAR GO MINI DC 18W 4000K 40° 1200 ON/OFF	DL23100342255
XB.LG.105ED103000	LINEAR GO MINI DC 4.5W 4000K 55°x20° 320 ON/OFF	DL23100342555
XB.LG.109ED303000	LINEAR GO MINI DC 9W 4000K 55°x20° 600 ON/OFF	DL23100342655
XB.LG.114ED403000	LINEAR GO MINI DC 13.5W 4000K 55°x20° 900 ON/OFF	DL23100342755
XB.LG.118ED603000	LINEAR GO MINI DC 18W 4000K 55°x20° 1200 ON/OFF	DL23100342855
XB.LG.105H2103000	LINEAR GO MINI DC 4.5W 5700K 20° 320 ON/OFF	DL23100343155
XB.LG.109H2303000	LINEAR GO MINI DC 9W 5700K 20° 600 ON/OFF	DL23100343255
XB.LG.114H2403000	LINEAR GO MINI DC 13.5W 5700K 20° 900 ON/OFF	DL23100343355
XB.LG.118H2603000	LINEAR GO MINI DC 18W 5700K 20° 1200 ON/OFF	DL23100343455
XB.LG.105H4103000	LINEAR GO MINI DC 4.5W 5700K 30° 320 ON/OFF	DL23100343755
XB.LG.109H4303000	LINEAR GO MINI DC 9W 5700K 30° 600 ON/OFF	DL23100343855
XB.LG.114H4403000	LINEAR GO MINI DC 13.5W 5700K 30° 900 ON/OFF	DL23100343955
XB.LG.118H4603000	LINEAR GO MINI DC 18W 5700K 30° 1200 ON/OFF	DL23100344055
XB.LG.105HB103000	LINEAR GO MINI DC 4.5W 5700K 40° 320 ON/OFF	DL23100344355
XB.LG.109HB303000	LINEAR GO MINI DC 9W 5700K 40° 600 ON/OFF	DL23100344455
XB.LG.114HB403000	LINEAR GO MINI DC 13.5W 5700K 40° 900 ON/OFF	DL23100344555
XB.LG.118HB603000	LINEAR GO MINI DC 18W 5700K 40° 1200 ON/OFF	DL23100344655
XB.LG.105HD103000	LINEAR GO MINI DC 4.5W 5700K 55°x20° 320 ON/OFF	DL23100344955
XB.LG.109HD303000	LINEAR GO MINI DC 9W 5700K 55°x20° 600 ON/OFF	DL23100345055
XB.LG.114HD403000	LINEAR GO MINI DC 13.5W 5700K 55°x20° 900 ON/OFF	DL23100345155
XB.LG.118HD603000	LINEAR GO MINI DC 18W 5700K 55°x20° 1200 ON/OFF	DL23100345255
XB.LG.105I2103000	LINEAR GO MINI DC 4.5W 6500K 20° 320 ON/OFF	DL23100345555
XB.LG.109I2303000	LINEAR GO MINI DC 9W 6500K 20° 600 ON/OFF	DL23100345655
XB.LG.114I2403000	LINEAR GO MINI DC 13.5W 6500K 20° 900 ON/OFF	DL23100345755
XB.LG.118I2603000	LINEAR GO MINI DC 18W 6500K 20° 1200 ON/OFF	DL23100345855
XB.LG.105I4103000	LINEAR GO MINI DC 4.5W 6500K 30° 320 ON/OFF	DL23100346155
XB.LG.109I4303000	LINEAR GO MINI DC 9W 6500K 30° 600 ON/OFF	DL23100346255
XB.LG.114I4403000	LINEAR GO MINI DC 13.5W 6500K 30° 900 ON/OFF	DL23100346355
XB.LG.118I4603000	LINEAR GO MINI DC 18W 6500K 30° 1200 ON/OFF	DL23100346455
XB.LG.105IB103000	LINEAR GO MINI DC 4.5W 6500K 40° 320 ON/OFF	DL23100346755
XB.LG.109IB303000	LINEAR GO MINI DC 9W 6500K 40° 600 ON/OFF	DL23100346855
XB.LG.114IB403000	LINEAR GO MINI DC 13.5W 6500K 40° 900 ON/OFF	DL23100346955
XB.LG.118IB603000	LINEAR GO MINI DC 18W 6500K 40° 1200 ON/OFF	DL23100347055
XB.LG.105ID103000	LINEAR GO MINI DC 4.5W 6500K 55°x20° 320 ON/OFF	DL23100347355
XB.LG.109ID303000	LINEAR GO MINI DC 9W 6500K 55°x20° 600 ON/OFF	DL23100347455
XB.LG.114ID403000	LINEAR GO MINI DC 13.5W 6500K 55°x20° 900 ON/OFF	DL23100347555
XB.LG.118ID603000	LINEAR GO MINI DC 18W 6500K 55°x20° 1200 ON/OFF	DL23100347655

### Fixtures (3.4W per 300mm / 1ft)

Model No.	Description	Item Code
XB.LG.104B2103000	LINEAR GO MINI DC 3.4W 2700K 20° 320 ON/OFF	DL23100376755
XB.LG.114B2603000	LINEAR GO MINI DC 13.6W 2700K 20° 1200 ON/OFF	DL23100376855
XB.LG.104B4103000	LINEAR GO MINI DC 3.4W 2700K 30° 320 ON/OFF	DL23100376955
XB.LG.114B4603000	LINEAR GO MINI DC 13.6W 2700K 30° 1200 ON/OFF	DL23100377055
XB.LG.104BB103000	LINEAR GO MINI DC 3.4W 2700K 40° 320 ON/OFF	DL23100377155
XB.LG.114BB603000	LINEAR GO MINI DC 13.6W 2700K 40° 1200 ON/OFF	DL23100377255
XB.LG.104BD103000	LINEAR GO MINI DC 3.4W 2700K 55°x20° 320 ON/OFF	DL23100377355
XB.LG.114BD603000	LINEAR GO MINI DC 13.6W 2700K 55°x20° 1200 ON/OFF	DL23100377455
XB.LG.104C2103000	LINEAR GO MINI DC 3.4W 3000K 20° 320 ON/OFF	DL23100377555
XB.LG.114C2603000	LINEAR GO MINI DC 13.6W 3000K 20° 1200 ON/OFF	DL23100377655
XB.LG.104C4103000	LINEAR GO MINI DC 3.4W 3000K 30° 320 ON/OFF	DL23100377755
XB.LG.114C4603000	LINEAR GO MINI DC 13.6W 3000K 30° 1200 ON/OFF	DL23100377855
XB.LG.104CB103000	LINEAR GO MINI DC 3.4W 3000K 40° 320 ON/OFF	DL23100377955
XB.LG.114CB603000	LINEAR GO MINI DC 13.6W 3000K 40° 1200 ON/OFF	DL23100378055
XB.LG.104CD103000	LINEAR GO MINI DC 3.4W 3000K 55°x20° 320 ON/OFF	DL23100378155
XB.LG.114CD603000	LINEAR GO MINI DC 13.6W 3000K 55°x20° 1200 ON/OFF	DL23100378255
XB.LG.104E2103000	LINEAR GO MINI DC 3.4W 4000K 20° 320 ON/OFF	DL23100378355
XB.LG.114E2603000	LINEAR GO MINI DC 13.6W 4000K 20° 1200 ON/OFF	DL23100378455
XB.LG.104E4103000	LINEAR GO MINI DC 3.4W 4000K 30° 320 ON/OFF	DL23100378555
XB.LG.114E4603000	LINEAR GO MINI DC 13.6W 4000K 30° 1200 ON/OFF	DL23100378655
XB.LG.104EB103000	LINEAR GO MINI DC 3.4W 4000K 40° 320 ON/OFF	DL23100378755
XB.LG.114EB603000	LINEAR GO MINI DC 13.6W 4000K 40° 1200 ON/OFF	DL23100378855
XB.LG.104ED103000	LINEAR GO MINI DC 3.4W 4000K 55°x20° 320 ON/OFF	DL23100378955
XB.LG.114ED603000	LINEAR GO MINI DC 13.6W 4000K 55°x20° 1200 ON/OFF	DL23100379055
XB.LG.104H2103000	LINEAR GO MINI DC 3.4W 5700K 20° 320 ON/OFF	DL23100379155
XB.LG.114H2603000	LINEAR GO MINI DC 13.6W 5700K 20° 1200 ON/OFF	DL23100379255
XB.LG.104H4103000	LINEAR GO MINI DC 3.4W 5700K 30° 320 ON/OFF	DL23100379355
XB.LG.114H4603000	LINEAR GO MINI DC 13.6W 5700K 30° 1200 ON/OFF	DL23100379455
XB.LG.104HB103000	LINEAR GO MINI DC 3.4W 5700K 40° 320 ON/OFF	DL23100379555
XB.LG.114HB603000	LINEAR GO MINI DC 13.6W 5700K 40° 1200 ON/OFF	DL23100379655
XB.LG.104HD103000	LINEAR GO MINI DC 3.4W 5700K 55°x20° 320 ON/OFF	DL23100379755
XB.LG.114HD603000	LINEAR GO MINI DC 13.6W 5700K 55°x20° 1200 ON/OFF	DL23100379855
XB.LG.104I2103000	LINEAR GO MINI DC 3.4W 6500K 20° 320 ON/OFF	DL23100379955
XB.LG.114I2603000	LINEAR GO MINI DC 13.6W 6500K 20° 1200 ON/OFF	DL23100380055
XB.LG.104I4103000	LINEAR GO MINI DC 3.4W 6500K 30° 320 ON/OFF	DL23100380155
XB.LG.114I4603000	LINEAR GO MINI DC 13.6W 6500K 30° 1200 ON/OFF	DL23100380255
XB.LG.104IB103000	LINEAR GO MINI DC 3.4W 6500K 40° 320 ON/OFF	DL23100380355
XB.LG.114IB603000	LINEAR GO MINI DC 13.6W 6500K 40° 1200 ON/OFF	DL23100380455
XB.LG.104ID103000	LINEAR GO MINI DC 3.4W 6500K 55°x20° 320 ON/OFF	DL23100380555
XB.LG.114ID603000	LINEAR GO MINI DC 13.6W 6500K 55°x20° 1200 ON/OFF	DL23100380655

#### TX Connect

Model No.	Description	Item Code
N / A	STARTER CABLE JYK DC 2-PIN 0.5M	DA23100096855
N / A	STARTER CABLE JYK DC 2-PIN 2M	DA23100096955
N / A	INTERCONNECTION CABLE JYK DC 2-PIN 0.5M	DA23100097055
N / A	INTERCONNECTION CABLE JYK DC 2-PIN 2M	DA23100097155
N / A	END CAP JYK DC 2-PIN	DA23100097255

#### TX Control

Model No.	Description	Item Code
N / A	LED ENGINE 24V 100W OUTDOOR	AM175860055
N / A	LED ENGINE 24V 185W OUTDOOR	AM175880055
N / A	LED ENGINE 24V 320W OUTDOOR	AM089350055