

LEDENVO® Streetlight Plus

Datasheet



CB 

LEDENVO® Streetlight Plus is an advanced intelligent streetlight designed for integration into smart city control systems. It features a classical appearance, ergonomic structure, precise optical design, and an extra-long lifetime, providing beautiful, reliable, and energy-saving lighting solutions to ensure street safety and pedestrian comfort. Built with robust die-cast aluminum housing, it withstands harsh outdoor environments, achieving IP66 and IK10 ratings. LEDENVO® Streetlight Plus is suitable for various street lighting applications, including urban express ways and major urban roads.

Benefits

Super High Cost-Performance

- Up to 170lm/w efficacy
- Precise optics ensure comfort and safety
- Lumen maintenance L70 -100,000 hours
- Smart city connectivity with NEMA interface and 1-10V dimming
- Flicker-free operation
- Options of PC lens cover and glass cover

Robust and Reliable

- Die casting aluminum housing
- High impact resistance
- High protection level for outdoor use (IP66)
- Independent surge protection (10KV)
- Wide operating temperature range: -40°C to +50°C

User-Friendly

- Compact size and lightweight
- Top-opening design for easy maintenance
- Suitable for mounting on 40~60mm diameter poles

Applications

- Urban road lighting
- Rural road lighting
- Commercial district road lighting
- Industrial areas road lighting
- Parking lot lighting

LEDENVO® Streetlight Plus

Technical Data

Optical Specifications – Glass Cover

	Size 1	Size 2	Size 3			Size 4		Size 5		
Power	30W	50W	60W	75W	90W	100W	120W	150W	180W	
Luminous Flux	@3000K	4350 lm	7250 lm	8700 lm	10875 lm	13050 lm	14500 lm	17400 lm	21750 lm	26100 lm
	@4000K	4650 lm	7750 lm	9300 lm	11625 lm	13950 lm	15500 lm	18600 lm	23250 lm	27900 lm
	@5700K	4650 lm	7750 lm	9300 lm	11625 lm	13950 lm	15500 lm	18600 lm	23250 lm	27900 lm
Efficacy	@3000K	145lm/W, Up to 150 lm/W								
	@4000K	155lm/W, Up to 160 lm/W								
	@5700K	155lm/W, Up to 160 lm/W								
CCT	3000K, 4000K, 5700K, other on request									
CRI	CRI 70, other on request									
SDCM	5									
Beam Angle	SMB (150° x 90°)									
Cover	PC (Polycarbonate) + Toughened glass									
Weight	1.6Kg	2.4Kg	3.0Kg			3.6Kg		4.5Kg		

Optical Specifications – Lens Cover

	Size 1	Size 2	Size 3			Size 4		Size 5		
Power	30W	50W	60W	75W	90W	100W	120W	150W	180W	
Luminous Flux	@3000K	4500 lm	7500 lm	9000 lm	11250 lm	13500 lm	15000 lm	18000 lm	22500 lm	27000 lm
	@4000K	4950 lm	8250 lm	9900 lm	12375 lm	14850 lm	16500 lm	19800 lm	24750 lm	29700 lm
	@5700K	4950 lm	8250 lm	9900 lm	12375 lm	14850 lm	16500 lm	19800 lm	24750 lm	29700 lm
Efficacy	@3000K	150lm/W, Up to 160 lm/W								
	@4000K	165lm/W, Up to 170 lm/W								
	@5700K	165lm/W, Up to 170 lm/W								
CCT	3000K, 4000K, 5700K, other on request									
CRI	CRI 70, other on request									
SDCM	5									
Beam Angle	SNB (155° x 55°)					SMB (150° x 68°)				
Cover	Weather resistance Polycarbonate									
Weight	1.4Kg	2.2Kg	2.7Kg			3.2Kg		3.9Kg		

Due to the special conditions of manufacturing process of LED, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from typical data.

Exceeding maximum ratings for operation voltage will cause hazardous overload and will likely destroy the LED module.

Exceeding maximum ratings for operation and storage temperature will reduce expected life time or destroy the LED module.

OSRAM is a trademark of OSRAM GmbH.

Traxon is the exclusive licensee of product trademark OSRAM for Professional General Lighting products in Mainland China, Hong Kong and Macau, additional fixed list of General Lighting products globally.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LEDENVO® Streetlight Plus

Technical Data

Electrical and Mechanical Specifications

Input Voltage	220-240V AC 50/60Hz								
Power Consumption	30W	50W	60W	75W	90W	100W	120W	150W	180W
Power Factor	0.90				0.95				
Total Harmonic Distortion	≤10%								
Surge protection	Independent surge protection device, Line-to-line 10KV, line-to-ground 10KV								
Dimension (L x W x H, mm)	306 x 167 x 142	325 x 218 x 143	379 x 245 x 146		446 x 271 x 148		496 x 299 x 148		
Housing	Die-casting aluminum with RAL9006 powder painting								
Color	RAL 9006								

System Specifications

Power	AC power, 220-240V AC 50/60HZ
Control	1~10V, 1-10V with NEMA, Step DIM on request
Mounting	Side Entry - Pole of Ø40mm / Ø60mm
Operating Temperature	-30°C to +50°C
Storage Temperature	-40°C to +80°C
Environment	Outdoor, IP66, IK10 for Lens cover, IK08 for Glass cover
Lumen Maintenance	L70 - 100,000hrs
Warranty	5 years
Safety Approval	Electrical Protection Class I, CB, CQC, Photobiological safety, RoHS

Due to the special conditions of manufacturing process of LED, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from typical data.

Exceeding maximum ratings for operation voltage will cause hazardous overload and will likely destroy the LED module.

Exceeding maximum ratings for operation and storage temperature will reduce expected life time or destroy the LED module.


OSRAM is a trademark of OSRAM GmbH.

Traxon is the exclusive licensee of product trademark OSRAM for Professional General Lighting products in Mainland China, Hong Kong and Macau, additional fixed list of General Lighting products globally.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LEDENVO® Streetlight Plus

Dimensions (Unit: mm)

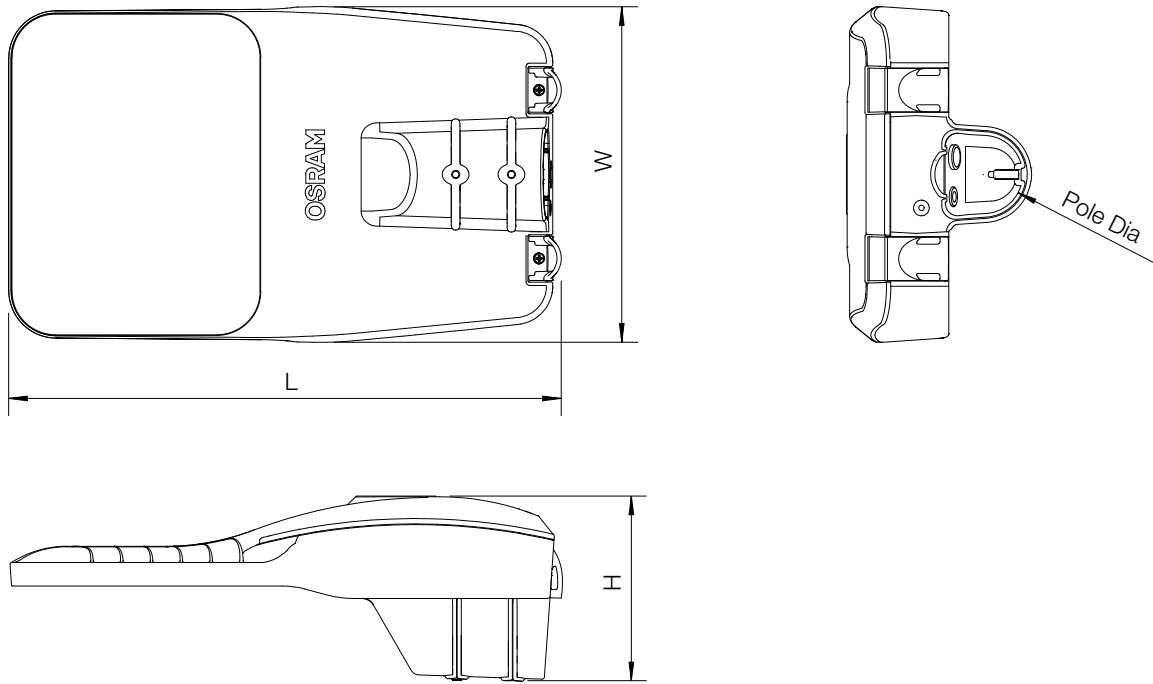

Dimensions

	Size 1	Size 2	Size 3	Size 4	Size 5
Power	30W	50W / 60W	75W / 90W	100W / 120W	150W / 180W
Length	306mm	325mm	379mm	446mm	496mm
Width	167mm	218mm	245mm	271mm	299mm
Height	142mm	143mm	146mm	148mm	148mm
Pole Dia	64mm	64mm	64mm	64mm	64mm

OSRAM is a trademark of OSRAM GmbH.

Traxon is the exclusive licensee of product trademark OSRAM for Professional General Lighting products in Mainland China, Hong Kong and Macau, additional fixed list of General Lighting products globally.


Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LEDENVO® Streetlight Plus

Photometrics


Light Distribution Curve - Glass Cover

SMB (150° x 90°)

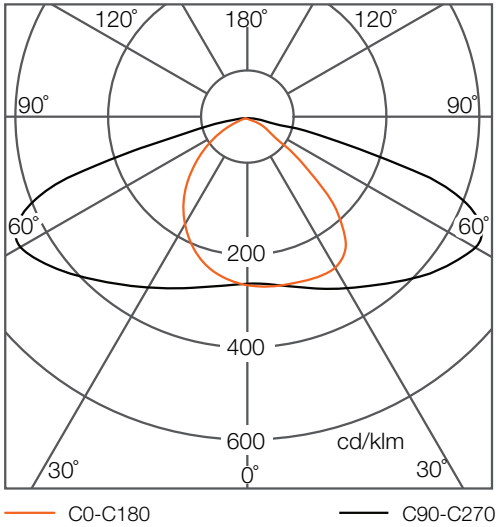


Light Distribution Curve - Lens Cover

SNB (155° x 55°)

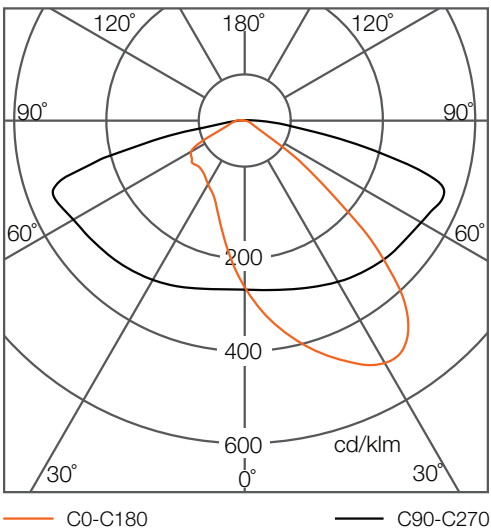

SMB (150° x 68°)

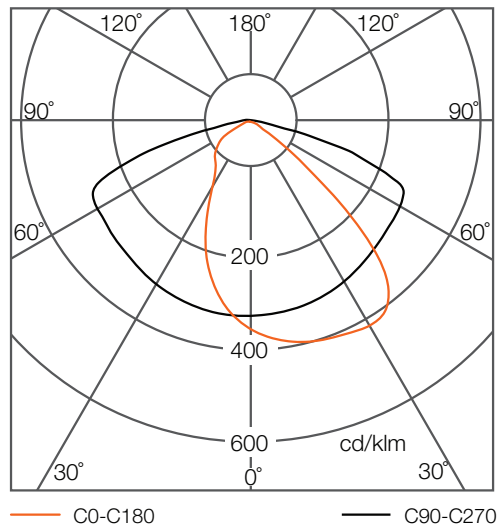

Due to the manufacturing processes of LED, the polar candela distribution and distance luminaires only reflect statistical figures and do not necessarily correspond to the actual parameters of individual product that may differ from the typical values.

OSRAM is a trademark of OSRAM GmbH.

Traxon is the exclusive licensee of product trademark OSRAM for Professional General Lighting products in Mainland China, Hong Kong and Macau, additional fixed list of General Lighting products globally.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LEDENVO® Streetlight Plus

Ordering Codes

Fixture – Glass Cover

Short Text	Power	CCT	Beam	Control	IC
LEDENVO ST PLUS 30W 730 SMB GC	30W	3000K	SMB (150°x90°)	1-10V Dim	GL24100942855
LEDENVO ST PLUS 30W 740 SMB GC	30W	4000K	SMB (150°x90°)	1-10V Dim	GL24100942955
LEDENVO ST PLUS 30W 757 SMB GC	30W	5700K	SMB (150°x90°)	1-10V Dim	GL24100943055
LEDENVO ST PLUS 50W 730 SMB GC	50W	3000K	SMB (150°x90°)	1-10V Dim	GL24100943155
LEDENVO ST PLUS 50W 740 SMB GC	50W	4000K	SMB (150°x90°)	1-10V Dim	GL24100943255
LEDENVO ST PLUS 50W 757 SMB GC	50W	5700K	SMB (150°x90°)	1-10V Dim	GL24100943355
LEDENVO ST PLUS 60W 730 SMB GC	60W	3000K	SMB (150°x90°)	1-10V Dim	GL24100943455
LEDENVO ST PLUS 60W 740 SMB GC	60W	4000K	SMB (150°x90°)	1-10V Dim	GL24100943555
LEDENVO ST PLUS 60W 757 SMB GC	60W	5700K	SMB (150°x90°)	1-10V Dim	GL24100943655
LEDENVO ST PLUS 75W 730 SMB GC	75W	3000K	SMB (150°x90°)	1-10V Dim	GL24100943755
LEDENVO ST PLUS 75W 740 SMB GC	75W	4000K	SMB (150°x90°)	1-10V Dim	GL24100943855
LEDENVO ST PLUS 75W 757 SMB GC	75W	5700K	SMB (150°x90°)	1-10V Dim	GL24100943955
LEDENVO ST PLUS 90W 730 SMB GC	90W	3000K	SMB (150°x90°)	1-10V Dim	GL24100944055
LEDENVO ST PLUS 90W 740 SMB GC	90W	4000K	SMB (150°x90°)	1-10V Dim	GL24100944155
LEDENVO ST PLUS 90W 757 SMB GC	90W	5700K	SMB (150°x90°)	1-10V Dim	GL24100944255
LEDENVO ST PLUS 100W 730 SMB GC	100W	3000K	SMB (150°x90°)	1-10V Dim	GL24100944355
LEDENVO ST PLUS 100W 740 SMB GC	100W	4000K	SMB (150°x90°)	1-10V Dim	GL24100944455
LEDENVO ST PLUS 100W 757 SMB GC	100W	5700K	SMB (150°x90°)	1-10V Dim	GL24100944555
LEDENVO ST PLUS 120W 730 SMB GC	120W	3000K	SMB (150°x90°)	1-10V Dim	GL24100944655
LEDENVO ST PLUS 120W 740 SMB GC	120W	4000K	SMB (150°x90°)	1-10V Dim	GL24100944755
LEDENVO ST PLUS 120W 757 SMB GC	120W	5700K	SMB (150°x90°)	1-10V Dim	GL24100944855
LEDENVO ST PLUS 150W 730 SMB GC	150W	3000K	SMB (150°x90°)	1-10V Dim	GL24100944955
LEDENVO ST PLUS 150W 740 SMB GC	150W	4000K	SMB (150°x90°)	1-10V Dim	GL24100945055
LEDENVO ST PLUS 150W 757 SMB GC	150W	5700K	SMB (150°x90°)	1-10V Dim	GL24100945155
LEDENVO ST PLUS 180W 730 SMB GC	180W	3000K	SMB (150°x90°)	1-10V Dim	GL24100945255
LEDENVO ST PLUS 180W 740 SMB GC	180W	4000K	SMB (150°x90°)	1-10V Dim	GL24100945355
LEDENVO ST PLUS 180W 757 SMB GC	180W	5700K	SMB (150°x90°)	1-10V Dim	GL24100945455
LEDENVO ST PLUS 30W 730 SMB NEMA GC	30W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100945555
LEDENVO ST PLUS 30W 740 SMB NEMA GC	30W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100945655
LEDENVO ST PLUS 30W 757 SMB NEMA GC	30W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100945755
LEDENVO ST PLUS 50W 730 SMB NEMA GC	50W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100945855
LEDENVO ST PLUS 50W 740 SMB NEMA GC	50W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100945955
LEDENVO ST PLUS 50W 757 SMB NEMA GC	50W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946055
LEDENVO ST PLUS 60W 730 SMB NEMA GC	60W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946155
LEDENVO ST PLUS 60W 740 SMB NEMA GC	60W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946255
LEDENVO ST PLUS 60W 757 SMB NEMA GC	60W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946355
LEDENVO ST PLUS 75W 730 SMB NEMA GC	75W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946455
LEDENVO ST PLUS 75W 740 SMB NEMA GC	75W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946555
LEDENVO ST PLUS 75W 757 SMB NEMA GC	75W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946655
LEDENVO ST PLUS 90W 730 SMB NEMA GC	90W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946755
LEDENVO ST PLUS 90W 740 SMB NEMA GC	90W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946855
LEDENVO ST PLUS 90W 757 SMB NEMA GC	90W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100946955
LEDENVO ST PLUS 100W 730 SMB NEMA GC	100W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947055
LEDENVO ST PLUS 100W 740 SMB NEMA GC	100W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947155
LEDENVO ST PLUS 100W 757 SMB NEMA GC	100W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947255

OSRAM is a trademark of OSRAM GmbH.

Traxon is the exclusive licensee of product trademark OSRAM for Professional General Lighting products in Mainland China, Hong Kong and Macau, additional fixed list of General Lighting products globally.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LEDENVO® Streetlight Plus

Ordering Codes

Fixture – Glass Cover

Short Text	Power	CCT	Beam	Control	IC
LEDENVO ST PLUS 120W 730 SMB NEMA GC	120W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947355
LEDENVO ST PLUS 120W 740 SMB NEMA GC	120W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947455
LEDENVO ST PLUS 120W 757 SMB NEMA GC	120W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947555
LEDENVO ST PLUS 150W 730 SMB NEMA GC	150W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947655
LEDENVO ST PLUS 150W 740 SMB NEMA GC	150W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947755
LEDENVO ST PLUS 150W 757 SMB NEMA GC	150W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947855
LEDENVO ST PLUS 180W 730 SMB NEMA GC	180W	3000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100947955
LEDENVO ST PLUS 180W 740 SMB NEMA GC	180W	4000K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100948055
LEDENVO ST PLUS 180W 757 SMB NEMA GC	180W	5700K	SMB (150°x90°)	1-10V Dim with NEMA	GL24100948155

Fixture – PC Lens Cover

Short Text	Power	CCT	Beam	Control	IC
LEDENVO ST PLUS 30W 730 SNB LC	30W	3000K	SNB (155°x55°)	1-10V Dim	GL24100937455
LEDENVO ST PLUS 30W 740 SNB LC	30W	4000K	SNB (155°x55°)	1-10V Dim	GL24100937555
LEDENVO ST PLUS 30W 757 SNB LC	30W	5700K	SNB (155°x55°)	1-10V Dim	GL24100937655
LEDENVO ST PLUS 50W 730 SNB LC	50W	3000K	SNB (155°x55°)	1-10V Dim	GL24100937755
LEDENVO ST PLUS 50W 740 SNB LC	50W	4000K	SNB (155°x55°)	1-10V Dim	GL24100937855
LEDENVO ST PLUS 50W 757 SNB LC	50W	5700K	SNB (155°x55°)	1-10V Dim	GL24100937955
LEDENVO ST PLUS 60W 730 SNB LC	60W	3000K	SNB (155°x55°)	1-10V Dim	GL24100938055
LEDENVO ST PLUS 60W 740 SNB LC	60W	4000K	SNB (155°x55°)	1-10V Dim	GL24100938155
LEDENVO ST PLUS 60W 757 SNB LC	60W	5700K	SNB (155°x55°)	1-10V Dim	GL24100938255
LEDENVO ST PLUS 75W 730 SNB LC	75W	3000K	SNB (155°x55°)	1-10V Dim	GL24100938355
LEDENVO ST PLUS 75W 740 SNB LC	75W	4000K	SNB (155°x55°)	1-10V Dim	GL24100938455
LEDENVO ST PLUS 75W 757 SNB LC	75W	5700K	SNB (155°x55°)	1-10V Dim	GL24100938555
LEDENVO ST PLUS 90W 730 SMB LC	90W	3000K	SNB (155°x55°)	1-10V Dim	GL24100938655
LEDENVO ST PLUS 90W 740 SMB LC	90W	4000K	SNB (155°x55°)	1-10V Dim	GL24100938755
LEDENVO ST PLUS 90W 757 SMB LC	90W	5700K	SNB (155°x55°)	1-10V Dim	GL24100938855
LEDENVO ST PLUS 100W 730 SMB LC	100W	3000K	SMB (150°x68°)	1-10V Dim	GL24100938955
LEDENVO ST PLUS 100W 740 SMB LC	100W	4000K	SMB (150°x68°)	1-10V Dim	GL24100939055
LEDENVO ST PLUS 100W 757 SMB LC	100W	5700K	SMB (150°x68°)	1-10V Dim	GL24100939155
LEDENVO ST PLUS 120W 730 SMB LC	120W	3000K	SMB (150°x68°)	1-10V Dim	GL24100939255
LEDENVO ST PLUS 120W 740 SMB LC	120W	4000K	SMB (150°x68°)	1-10V Dim	GL24100939355
LEDENVO ST PLUS 120W 757 SMB LC	120W	5700K	SMB (150°x68°)	1-10V Dim	GL24100939455
LEDENVO ST PLUS 150W 730 SMB LC	150W	3000K	SMB (150°x68°)	1-10V Dim	GL24100939555
LEDENVO ST PLUS 150W 740 SMB LC	150W	4000K	SMB (150°x68°)	1-10V Dim	GL24100939655
LEDENVO ST PLUS 150W 757 SMB LC	150W	5700K	SMB (150°x68°)	1-10V Dim	GL24100939755
LEDENVO ST PLUS 180W 730 SMB LC	180W	3000K	SMB (150°x68°)	1-10V Dim	GL24100939855
LEDENVO ST PLUS 180W 740 SMB LC	180W	4000K	SMB (150°x68°)	1-10V Dim	GL24100939955
LEDENVO ST PLUS 180W 757 SMB LC	180W	5700K	SMB (150°x68°)	1-10V Dim	GL24100940055
LEDENVO ST PLUS 30W 730 SNB NEMA LC	30W	3000K	SNB (155°x55°)	1-10V Dim with NEMA	GL24100940155
LEDENVO ST PLUS 30W 740 SNB NEMA LC	30W	4000K	SNB (155°x55°)	1-10V Dim with NEMA	GL24100940255
LEDENVO ST PLUS 30W 757 SNB NEMA LC	30W	5700K	SNB (155°x55°)	1-10V Dim with NEMA	GL24100940355

OSRAM is a trademark of OSRAM GmbH.

Traxon is the exclusive licensee of product trademark OSRAM for Professional General Lighting products in Mainland China, Hong Kong and Macau, additional fixed list of General Lighting products globally.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LEDENVO® Streetlight Plus

Ordering Codes

Fixture – PC Lens Cover

Short Text	Power	CCT	Beam	Control	IC
LEDENVO ST PLUS 50W 730 SNB NEMA LC	50W	3000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100940455
LEDENVO ST PLUS 50W 740 SNB NEMA LC	50W	4000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100940555
LEDENVO ST PLUS 50W 757 SNB NEMA LC	50W	5700K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100940655
LEDENVO ST PLUS 60W 730 SNB NEMA LC	60W	3000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100940755
LEDENVO ST PLUS 60W 740 SNB NEMA LC	60W	4000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100940855
LEDENVO ST PLUS 60W 757 SNB NEMA LC	60W	5700K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100940955
LEDENVO ST PLUS 75W 730 SNB NEMA LC	75W	3000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100941055
LEDENVO ST PLUS 75W 740 SNB NEMA LC	75W	4000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100941155
LEDENVO ST PLUS 75W 757 SNB NEMA LC	75W	5700K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100941255
LEDENVO ST PLUS 90W 730 SMB NEMA LC	90W	3000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100941355
LEDENVO ST PLUS 90W 740 SMB NEMA LC	90W	4000K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100941455
LEDENVO ST PLUS 90W 757 SMB NEMA LC	90W	5700K	SNB (155°×55°)	1-10V Dim with NEMA	GL24100941555
LEDENVO ST PLUS 100W 730 SMB NEMA LC	100W	3000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100941655
LEDENVO ST PLUS 100W 740 SMB NEMA LC	100W	4000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100941755
LEDENVO ST PLUS 100W 757 SMB NEMA LC	100W	5700K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100941855
LEDENVO ST PLUS 120W 730 SMB NEMA LC	120W	3000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100941955
LEDENVO ST PLUS 120W 740 SMB NEMA LC	120W	4000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942055
LEDENVO ST PLUS 120W 757 SMB NEMA LC	120W	5700K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942155
LEDENVO ST PLUS 150W 730 SMB NEMA LC	150W	3000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942255
LEDENVO ST PLUS 150W 740 SMB NEMA LC	150W	4000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942355
LEDENVO ST PLUS 150W 757 SMB NEMA LC	150W	5700K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942455
LEDENVO ST PLUS 180W 730 SMB NEMA LC	180W	3000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942555
LEDENVO ST PLUS 180W 740 SMB NEMA LC	180W	4000K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942655
LEDENVO ST PLUS 180W 757 SMB NEMA LC	180W	5700K	SMB (150°×68°)	1-10V Dim with NEMA	GL24100942755

