

NO.	PART NAME	DESCRIPTION	Q'TY	UNIT	Wiring Diagram				
					Define	P1	COLOR	P2	Define
③	TERM	TIN-PLATED,16# MOLEX: 39000077	4	PCS					
②	HSG	4P,4.2PH,WHITE,HF MOLEX: 39014041	2	PCS	24V+	1	Gray	4	24V+
①	WIRE	UL1430 16#/2C Flat Cable,Wire Color:1pcs Gray+ 1pcs White (See Wiring Diagram)	A/R	MM	-	-	-	-	-
					GND	4	White	1	GND

**Technical Parameters:**


Voltage Rating: DC300V 0.1 Sec.

Current Rating: 9 A

Insulation Resistance: ≥10 MPa

Conduction Resistance: ≤5 Pa

Compliance with ROHS

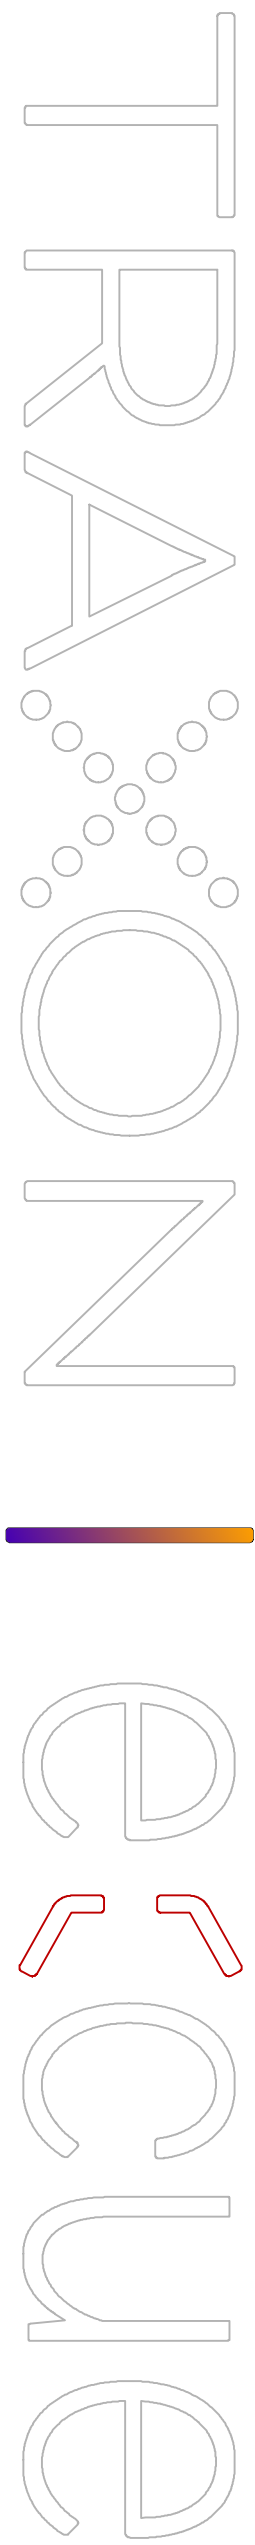

Product Name: TX CONNECT Smart 30cm Mini(Molex) to Mini (Sfemale) Converter			Project Name:	
Product Part Number:			Drawing Title:	
Traaxon Technologies and rescue Lighting control reserves the right to make changes to this information at any time. All of the information contained in these drawings is diagrammatic in nature and is not to be used for construction. Refer to applicable architectural and engineering drawings for fixture placement, wire and conduit paths, junction box placements, etc.			Location:	
			Date:	
			Drawing Notes	
			Scale: SCALE	

