



TRAXON Pro*

Washer Pro Mini Symphony




The Washer Pro Mini is part of a new, industry leading Wall Washer family of products producing high brightness, and high color saturation out of an extremely small form. Controlled via DMX512, with RDM, and paired with Traxon's DynaMood® technologies, the Traxon Washer Pro enables a selection of algorithms to define the lighting, and set the emotions of your lighting project.

The Mini offering provides multiple wattage/output options.

Our Symphony platform offers full spectrum lighting to increase the available color gamut, color fidelity and offer a tailored color profile.

This product is intended for use in high-quality colored light applications.

Dimensions

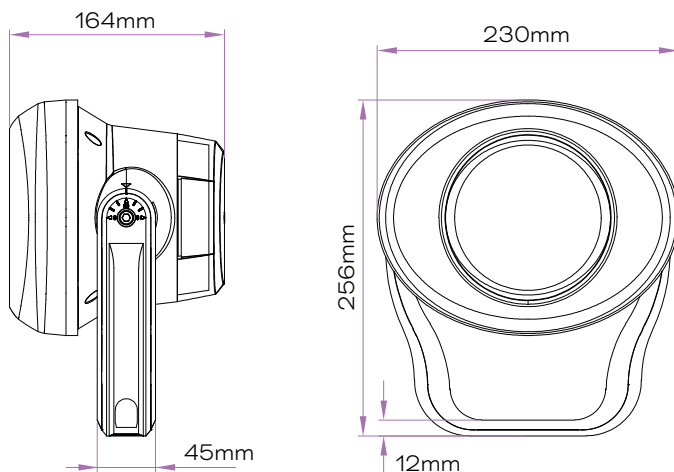

Project: _____
Type: _____



IP66



COAST



DMX 512



ANSI 3G



IK08

Technologies

- RDM enabled



Color Options



DGBVCLA



RGBW65CLA




RGBMCLA



RGBAW27
W40W65

Beam Angles

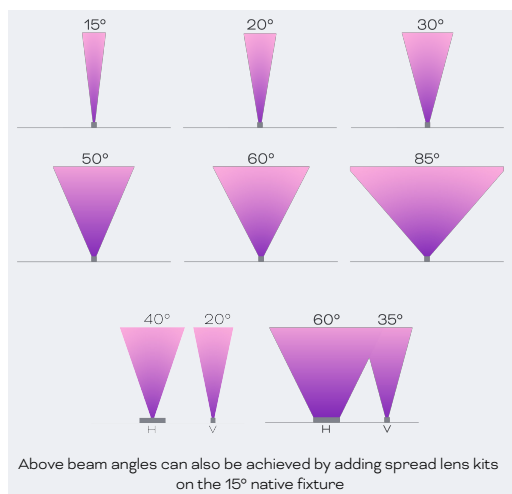

Finish



Traxon Signature Gray
RAL 7005



RAL 7015



RAL 9005



RAL 9003



Custom

Product Specifications

Model	DGBVCLA	RGBW65CLA	RGBMCLA	RGBAW27W40W65
Light Source	12 LED cluster (each cluster with 7 LED)			
Luminous Flux (7 Channel control, Dynamic Boost off)	1083.2 lm (full on 15°)	1895.3 lm (full on 15°)	1390.7 lm (full on 15°)	2541.4 lm (full on 15°)
Candela (7 Channel control, Dynamic Boost off)	7897.2 cd (full on 15°)	13817.4 cd (full on 15°)	10138.8 cd (full on 15°)	18527.2 cd (full on 15°)
Efficacy (7 Channel control, Dynamic Boost off)	17.9 lm/W (full on 15°)	31.2 lm/W (full on 15°)	22.9 lm/W (full on 15°)	41.9 lm/W (full on 15°)
CRI	High Fidelity (CRI) White mode: ≥93 for 2200K to 2700K and ≥95 for >2700K to 10000K			
Rg	High Gamut White mode: ~120 for 2700K to 6500K			
Beam Angles ¹	15° native 20°, 30°, 50°, 60°, 85°, 40°x20°, 60°x35° native or field-installed spread lens			
Cover Lens	Tempered Glass			
Housing	Die Cast Aluminum			
Housing Finish Options ²	Standard color: Traxon Signature Gray (RAL7005) Optional color: Gray (RAL7015), Black (RAL9005), White (RAL9003), Custom			
Adjustment Options	-5° to + 95°			
Mounting	Mounting via Yoke arm. Optional mounting accessories are available			
Dimensions (W x D x H)	230mm x 164mm x 256mm			
Weight	3.95kg			
EPA	Front: 0.49 sq.ft Side: 0.36 sq.ft			
Regulatory Listing & Safety Approval	CE, UKCA, ANSI C136.31-3G			
Operating Temperature	-30°C to +50°C (-22°F to +122°F)			
Minimum Starting Temperature	-20°C (-4°F)			
Storage Temperature	-40°C to +80°C (-40°F to +176°F)			
Environment	Outdoor, IP66, IK08, IK10 with Rock Guard, Coastal Environment (ASTM B117-16)			
Humidity	85%, non-condensing			

Electrical Specifications

Input Voltage ³	220-240V AC 50/60Hz
Power Consumption ⁴	60 W
Lumen Maintenance	L70 81000hrs @ 25°C
Power Factor	> 0.9

System Specifications

Power Supply	AC Line with integrated PSU
Control	DMX512, RDM Enabled RDM Personalities for DGBVCLA, RGBMCLA, RGBWCLA: 1. 7-Channel (Equal Current 7 channel control when Dynamic Boost is turned off. Dynamic Boost option is available as on or off option in RDM) 2. 7-Channel CAL (7 channel calibrated color, color matched) 3. 16-Bit (14 channel control - Colour, Colour Fine for each channel) 4. High Fidelity (CRI) White (2 channel control - Brightness and White CCT). Tunable from 2200K to 10000K 5. High Gamut White (Red enhanced white) (3 channel control - Brightness, White CCT and Red control (default value DMX255). Tunable from 2700K to 6500K 6. RGB CAL (3 channel to 7 color algorithm, calibrated color) 7. HSV (Hue, Saturation, Value (intensity), calibrated color - 3 channel control by converting H,S,V values to 0-255 DMX value) For RGBAW27W40W65, it includes 7-Channel, 7-Channel CAL and 16-Bit personalities.
Maximum number of daisy chain fixture per input power line	25PCS@220V AC

1. Spread lens assembled on 15° fixture (Light Loss of ~10%).

2. Custom RAL Housing available by request. MOQ and additional costs may apply. Consult with your regional Traxon Office for more information.

3. Single phase (line, neutral and ground).

4. The power can be set in the factory to achieve a fixed maximum power output to match project specifications and environmental targets (Washer Pro Mini: 30W-60W).

LED CHARACTERISTICS Because LEDs are semiconductor devices, their performances are subject to inherent variability commonly found in semiconductor industry. To improve consistency in performance across the same product, LED manufacturers "sort" LEDs into bins according to different preset parameters, such as forward driving voltage, illumination, etc. Whereas binning is a sorting function, it is not a correction process. Inherent variability in the manufacturing process results always in different binning distributions according to different production lots. Traxon uses automatically binned LEDs on its products, thereby minimizing output variations within the model range.

As with all electronic devices, LED output degrades over time – a term called lumen depreciation. This also explains why it is nearly impossible to expect photometric performances of two LED products with different service life spans to be the same. The rate of LED degrade is a complicated function of many factors such as operating efficiency, duration of continuous operation, and more significantly, environmental conditions (ambient temperature for example). If allowed working under optimal operating temperature range and with good ventilation, LED devices enjoy long service lives over conventional light sources. When using/installing LED devices, care should be taken to ensure that the devices will operate within the operating conditions specified in respective product literature.

This product contains a light source of energy efficiency class G to Regulation (EU) No 2019/2015.

Lumen measurement complies with LM-79-08 standard.


Lumen maintenance is calculated based on LM-80 compliant measurement.

DGBVCLA

Source Specifications

Source	DGBVCLA 12 LED cluster (each cluster with 7 LED)
Optics	15°

Candela Distribution

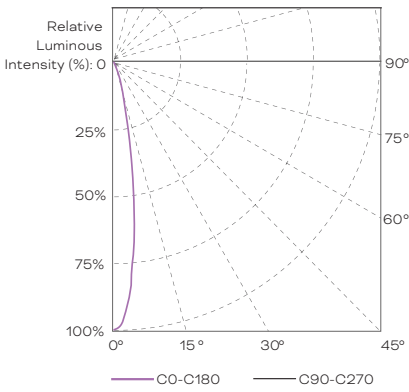

Light Output

Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
DGBVCLA Full-on	1083.2	7897.2	17.9
Deep Red	59.3	607.5	4.7
Green	283.0	2226.4	20.2
Royal Blue	46.0	341.8	3.2
Violet	2.3	21.9	0.2
Cyan	41.5	227.3	2.8
Lime	391.2	3207.1	26.6
Amber	171.8	1073.3	11.0

Luminaire setting: 7-Channel personality (dynamic boost off).

DGBVCLA Full-on	1178.9	8675.3	17.8
Deep Red	140.4	1419.8	5.5
Green	740.0	5848.3	25.3
Royal Blue	132.0	967.5	4.3
Violet	8.0	68.4	0.3
Cyan	457.6	2513.4	14.7
Lime	1006.4	8344.7	31.9
Amber	423.6	2668.4	12.7

Luminaire setting: 7-Channel personality (dynamic boost on).


Illuminance at a Distance

	Center Beam LUX/klm	Beam Width	
0.5m	29168	0.15m / 0.5'	1.6'
1.0m	7292	0.30m / 1'	3.3'
1.5m	3241	0.44m / 1.4'	4.9'
2.0m	1823	0.59m / 1.9'	6.6'
2.5m	1167	0.74m / 2.4'	8.2'
3.0m	810	0.89m / 2.9'	9.8'

For Foot-candle divide by 10.7 Horiz.Spread: 16.8°

IES and LDT files are available for download from the Traxon website.

DGBVCLA Gamut and Range

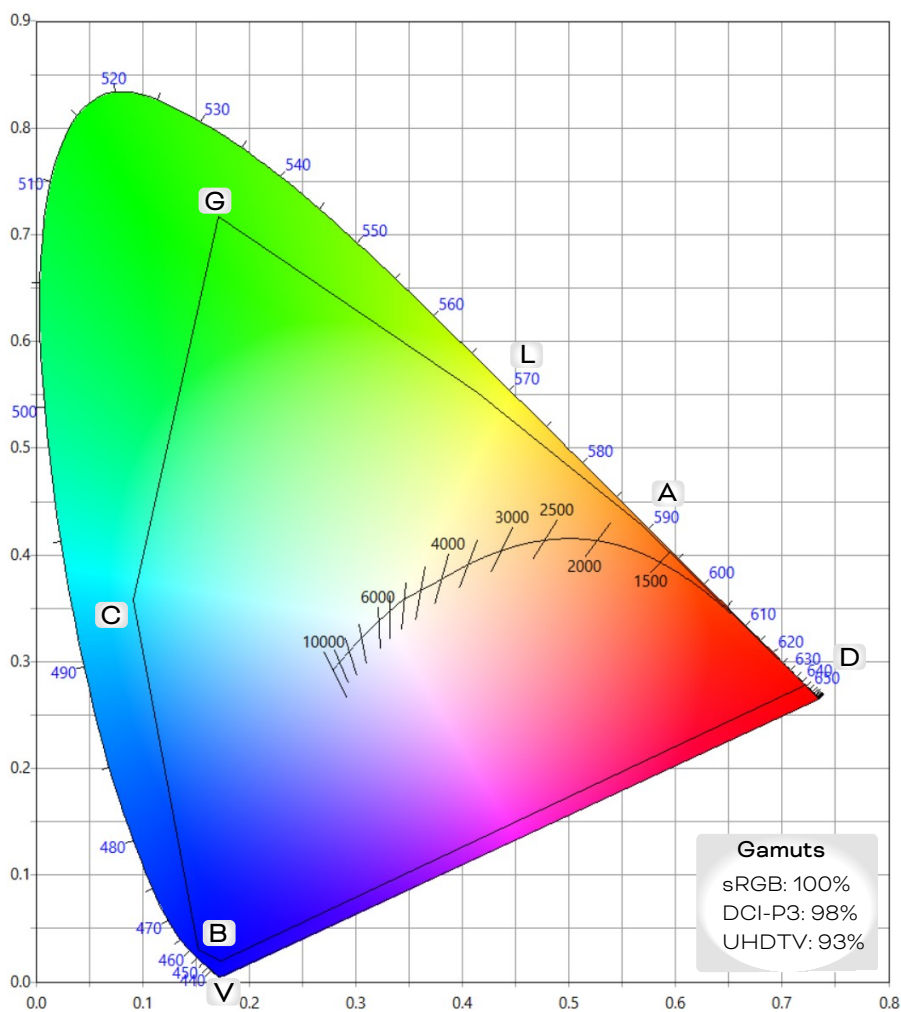


	Color	Dominant Wavelength (nm)
D	Deep Red	650
G	Green	525
B	Royal Blue	455
V	Violet	425
C	Cyan	495
L	Lime	565
A	Amber	590

DGBVCLA High Fidelity White (2200K-10000K CCT)

Source Specifications

Source	DGBVCLA 12 LED cluster (each cluster with 7 LED)
Optics	15°

Candela Distribution

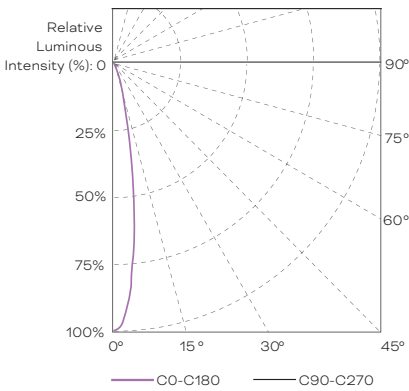

Light Output

Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
3000K	703.7	4866.6	15.1
4000K	891.9	6298.8	17.2
6500K	1336.1	9770.9	19.9

Under High Fidelity White personality, the CCT is tunable from 2200K to 10000K CCT
Luminaire setting: High Fidelity White personality.


Illuminance at a Distance

	Center Beam LUX/klm	Beam Width	
0.5m	29168	0.15m / 0.5'	1.6'
1.0m	7292	0.30m / 1'	3.3'
1.5m	3241	0.44m / 1.4'	4.9'
2.0m	1823	0.59m / 1.9'	6.6'
2.5m	1167	0.74m / 2.4'	8.2'
3.0m	810	0.89m / 2.9'	9.8'


For Foot-candle divide by 10.7 Horiz.Spread: 16.8°

IES and LDT files are available for download from the Traxon website.


DGBVCLA High Fidelity White (@3000K CCT) CRI>95

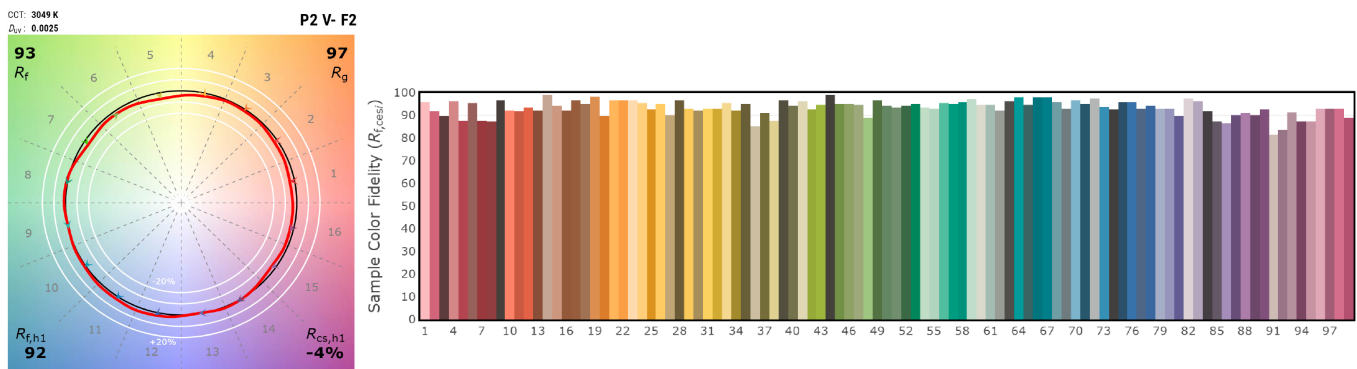

DGBVCLA High Fidelity White (@4000K CCT) CRI>95

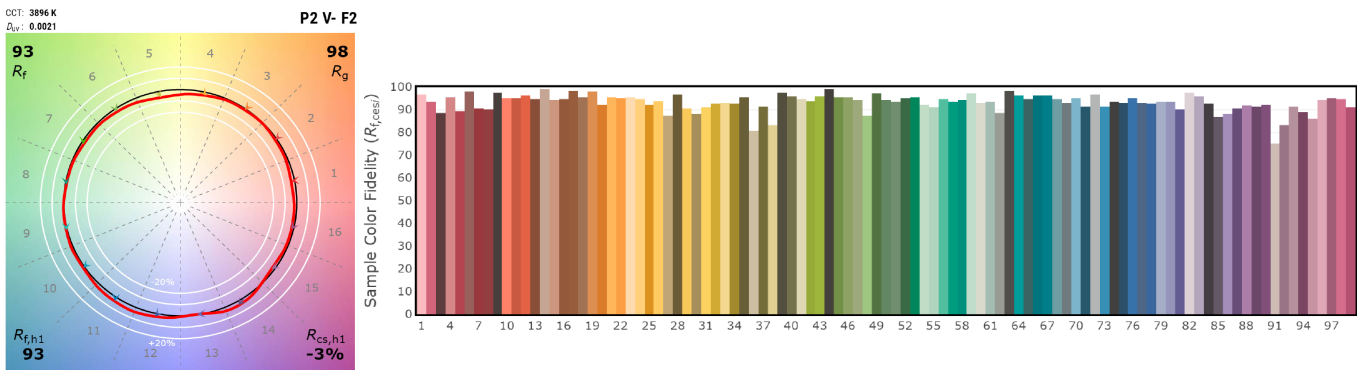

DGBVCLA High Fidelity White (@6500K CCT) CRI>95

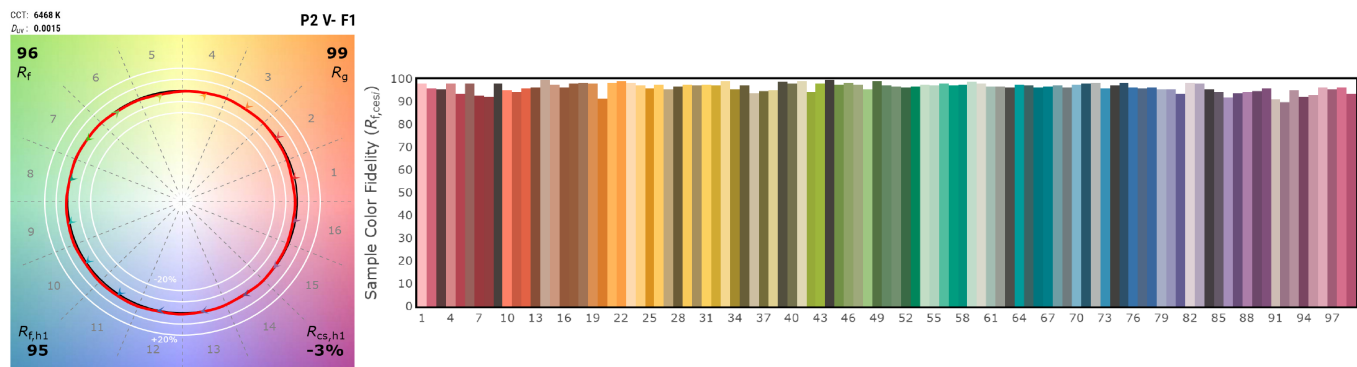


DGBVCLA High Gamut White (2700K-6500K CCT)

Source Specifications

Source	DGBVCLA 12 LED cluster (each cluster with 7 LED)
Optics	15°

Candela Distribution

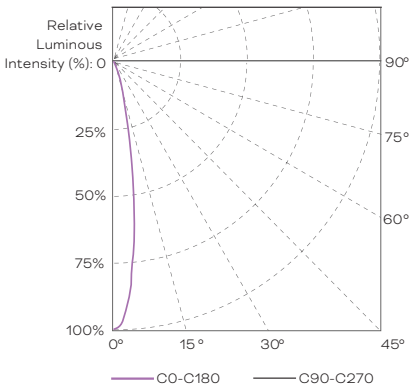

Light Output

Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
3000K	749.2	5797.3	16.0
4000K	859.5	6715.7	16.8
6500K	1129.5	8809.1	16.4

Under High Fidelity White personality, the CCT is tunable from 2200K to 6500K CCT
Luminaire setting: High Fidelity White personality.


Illuminance at a Distance

	Center Beam LUX/klm	Beam Width	
0.5m	29168	0.15m / 0.5'	1.6'
1.0m	7292	0.30m / 1'	3.3'
1.5m	3241	0.44m / 1.4'	4.9'
2.0m	1823	0.59m / 1.9'	6.6'
2.5m	1167	0.74m / 2.4'	8.2'
3.0m	810	0.89m / 2.9'	9.8'


For Foot-candle divide by 10.7 Horiz.Spread: 16.8°

IES and LDT files are available for download from the Traxon website.


DGBVCLA High Gamut White (@3000K CCT)

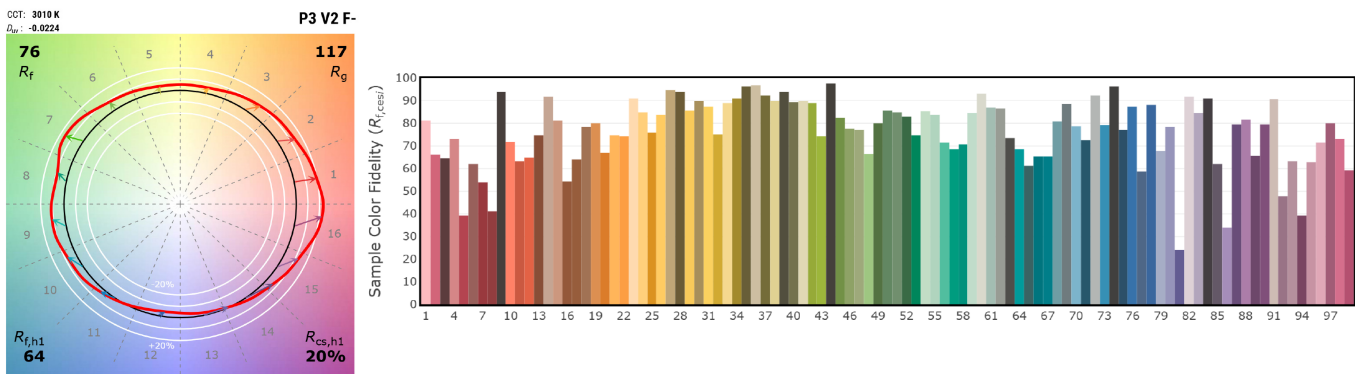

DGBVCLA High Gamut White (@4000K CCT)

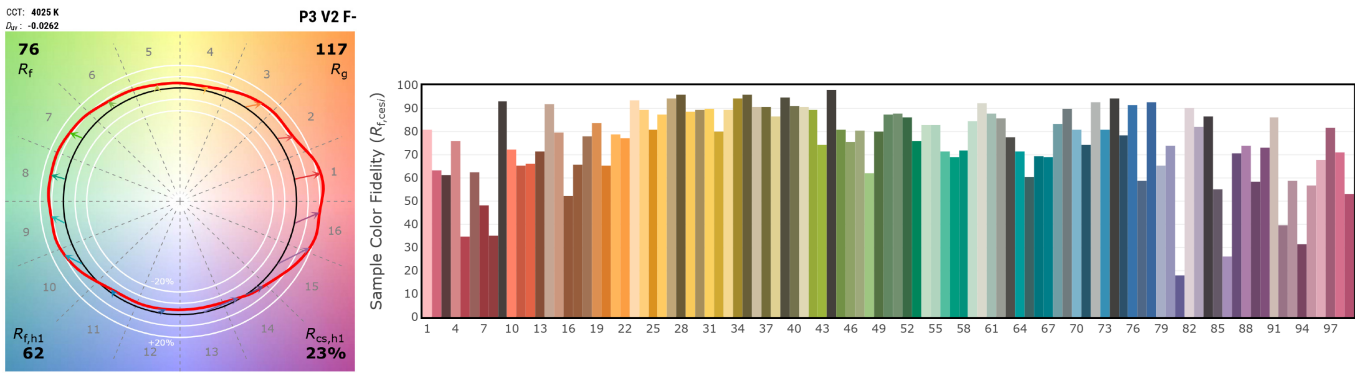

DGBVCLA High Gamut White (@6500K CCT)

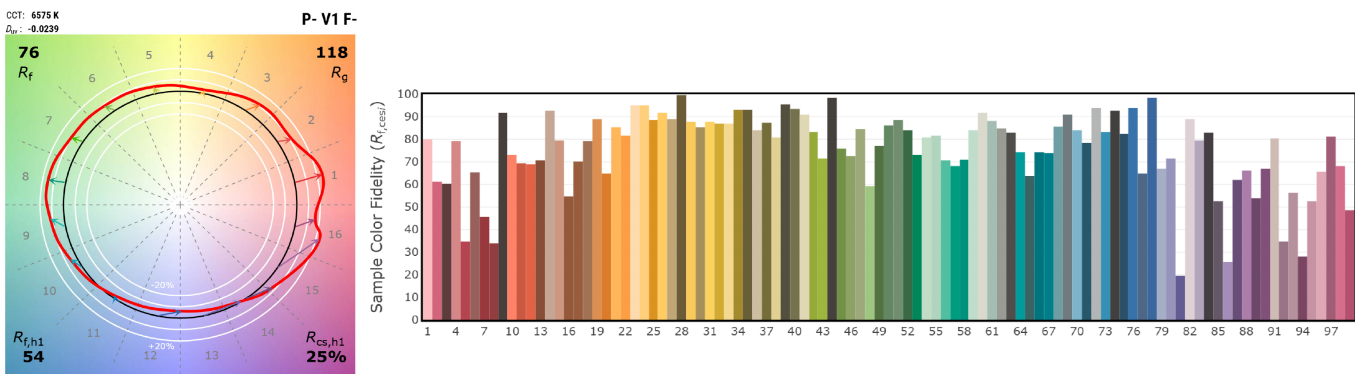


RGBMCLA

Source Specifications

Source	RGBMCLA 12 LED cluster (each cluster with 7 LED)
Optics	15°

Candela Distribution

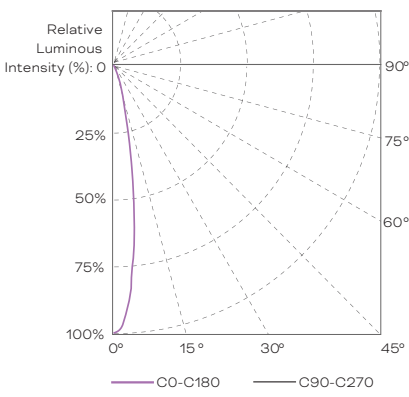

Light Output

Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
RGBMCLA Full-on	1390.7	10138.8	22.9
Red	71.1	727.9	5.6
Green	479.0	3768.7	34.2
Royal Blue	87.7	651.9	6.1
Mid Blue	72.8	706.6	5.0
Cyan	41.5	227.3	2.8
Lime	391.2	3207.1	26.6
Amber	171.8	1073.3	11.0

Luminaire setting: 7-Channel personality (dynamic boost off).

RGBMCLA Full-on	1501.5	11049.2	22.6
Red	168.3	1701.5	6.5
Green	1253.0	9902.9	42.8
Royal Blue	251.3	1842.4	8.1
Mid Blue	178.4	1529.6	5.8
Cyan	457.6	2513.4	14.7
Lime	1006.4	8344.7	31.9
Amber	423.6	2668.4	12.7

Luminaire setting: 7-Channel personality (dynamic boost on).

Illuminance at a Distance


	Center Beam LUX/klm	Beam Width	
0.5m	29168	0.15m / 0.5'	1.6'
1.0m	7292	0.30m / 1'	3.3'
1.5m	3241	0.44m / 1.4'	4.9'
2.0m	1823	0.59m / 1.9'	6.6'
2.5m	1167	0.74m / 2.4'	8.2'
3.0m	810	0.89m / 2.9'	9.8'

For Foot-candle divide by 10.7

■ Horiz.Spread: 16.8°


IES and LDT files are available for download from the Traxon website.

RGBMCLA Gamut and Range

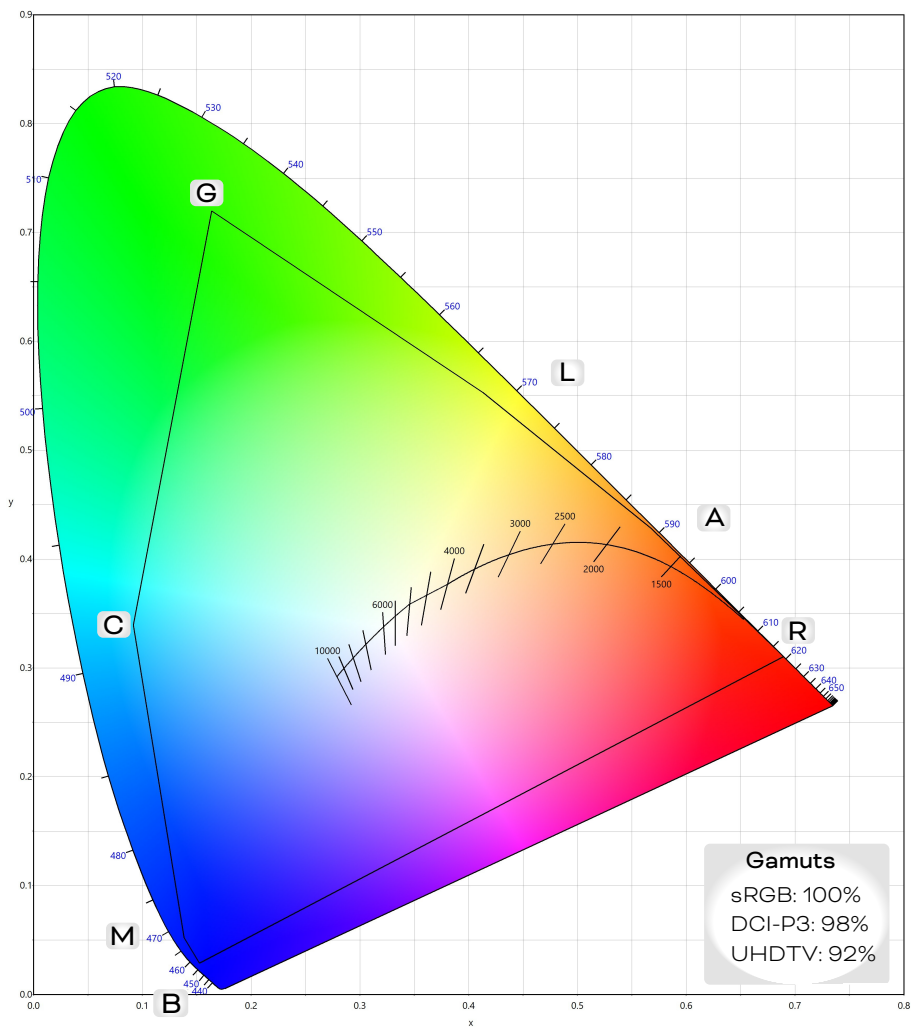


	Color	Dominant Wavelength (nm)
D	Red	625
G	Green	525
B	Royal Blue	455
V	Mid Blue	470
C	Cyan	495
L	Lime	565
A	Amber	590

Fixture Dimensions

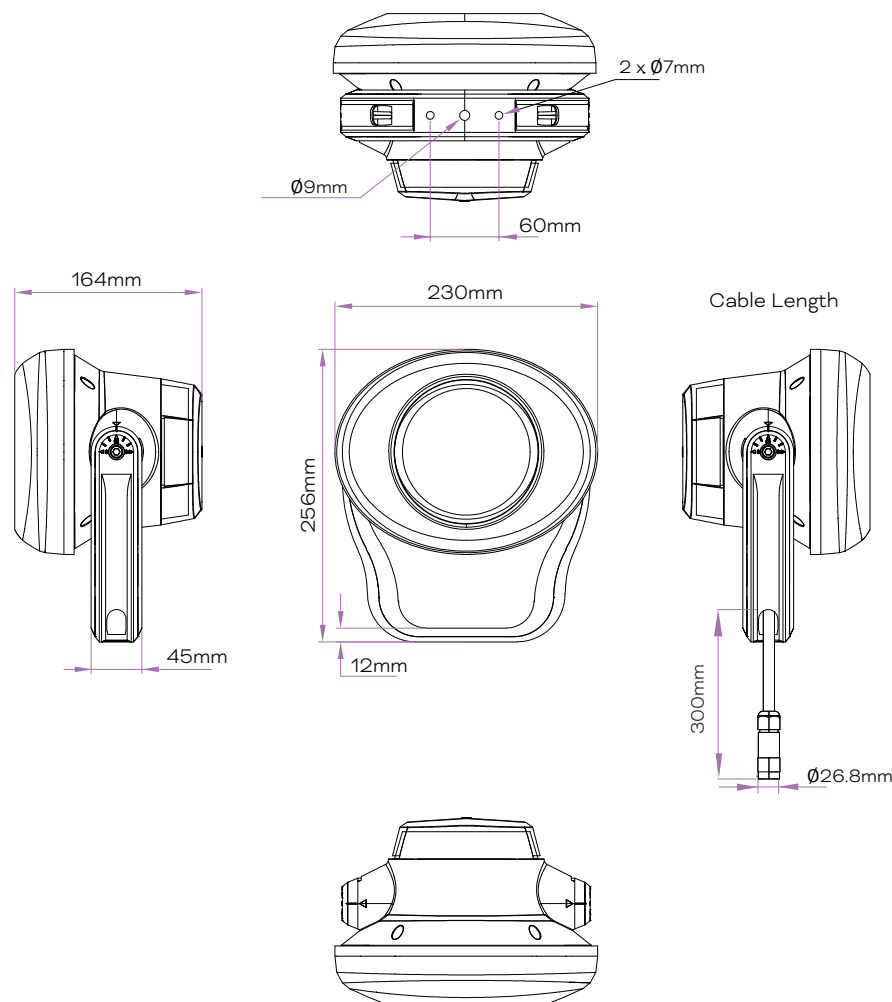

Optical Accessories


Spread Lens Kit		
Model No.	Description	Item Code
WP.SM.303000	W PRO SL KIT 60° MINI	DA23100028655
WP.SM.304000	W PRO SL KIT 60x10° MINI	DA23100029655

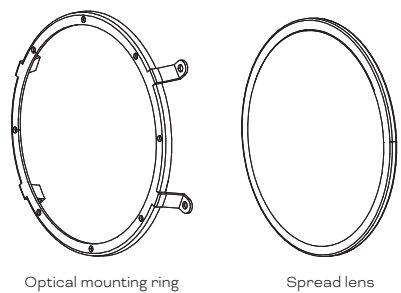


Optical Accessories

Glare Shield

Model No.	Description	Item Code
WP.AG.300000	W PRO GS ANGLED KIT MINI	DA23100030655
WP.AG.300100	W PRO GS ANGLED KIT MINI Gray	DA23100150455
WP.AG.300200	W PRO GS ANGLED KIT MINI Black	DA23100151455
WP.AG.300300	W PRO GS ANGLED KIT MINI White	DA23100152455




Angled glare shield




Optical mounting ring*

Model No.	Description	Item Code
WP.FG.300000	W PRO GS FULL KIT MINI	DA23100031455
WP.FG.300100	W PRO GS FULL KIT MINI Gray	DA23100150955
WP.FG.300200	W PRO GS FULL KIT MINI Black	DA23100151955
WP.FG.300300	W PRO GS FULL KIT MINI White	DA23100152955




Full glare shield



Optical mounting ring*

Rock Guard

Model No.	Description	Item Code
WP.RG.300000	W PRO RG MINI	DA23100032255
WP.RG.300100	W PRO RG MINI Gray	DA23100153255
WP.RG.300200	W PRO RG MINI Black	DA23100153555
WP.RG.300300	W PRO RG MINI White	DA23100153855




* Optical mounting ring included with glare shield's for spacing of the accessory.

Mounting Accessories


Rotatable Mount Plate

Model No.	Description	Item Code
WP.RP.300000	W PRO RP MINI	DA23100032755
WP.RP.300100	W PRO RP MINI Gray	DA23100154355
WP.RP.300200	W PRO RP MINI Black	DA23100154755
WP.RP.300300	W PRO RP MINI White	DA23100155155

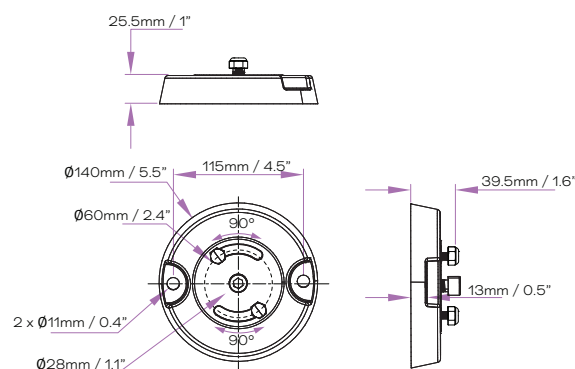

Tree Mount Accessories


Model No.	Description	Item Code
WP.TR.A00000	W PRO TREE RING	DA24102288155
N / A	W PRO MINI/ MIDI/ MAXI TREE RING MOUNTING PLATE	DA24102307255
N / A	W PRO MINI/ MIDI/ MAXI TREE RING ADAPTOR KIT FOR RP	DA24102288455
N / A	W PRO TX INJECTOR TREE RING MOUNTING PLATE	DA24102307355

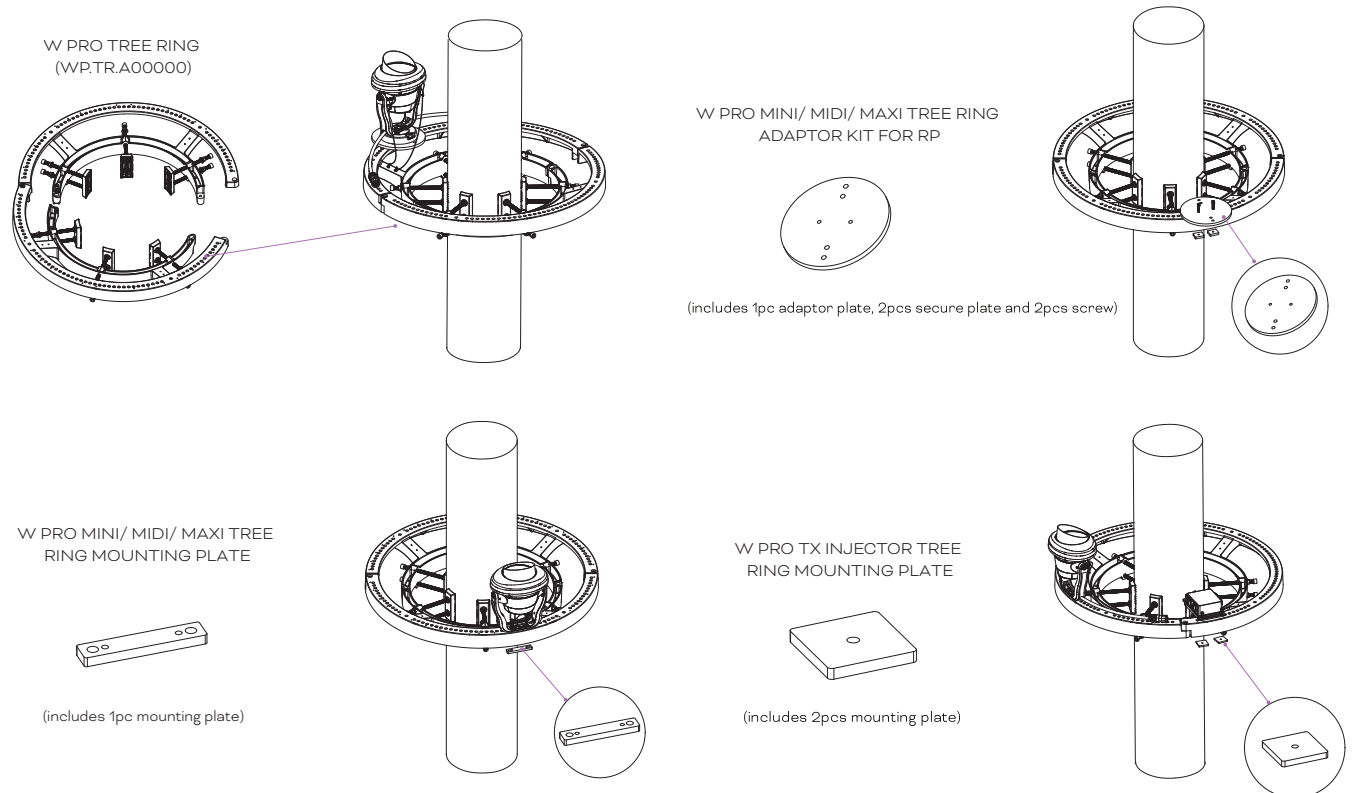

Mounting Accessories


Stake Mount

Model No.	Description	Item Code
WP.ST.300000	W PRO STAKE KIT MINI	DA24102307655

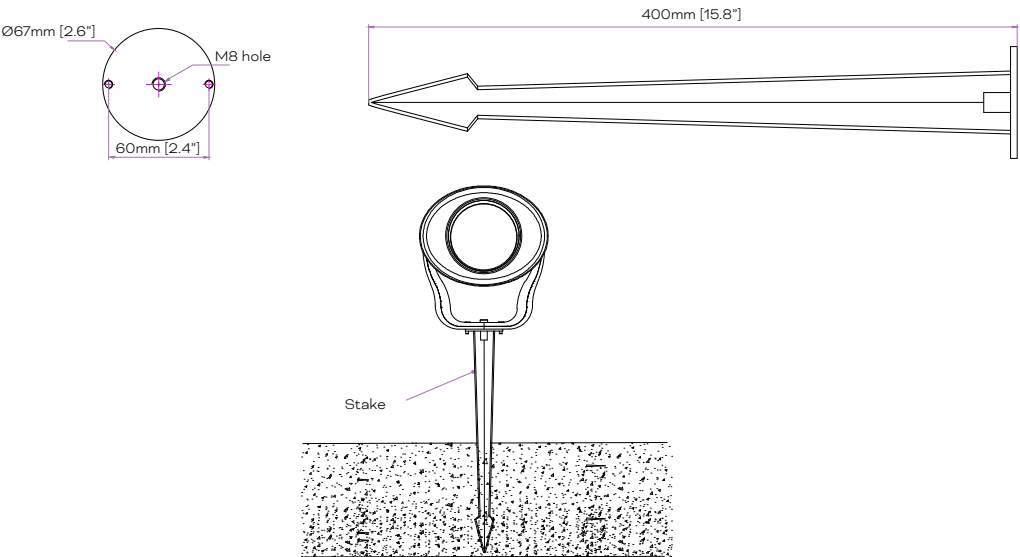


Connection Accessories

Washer Pro Mini / Midi / Maxi AC Starter Cable (CE) (CA.SC.CC301000 / CA.SC.CC302000 / CA.SC.CC303000 / CA.SC.CC310000)

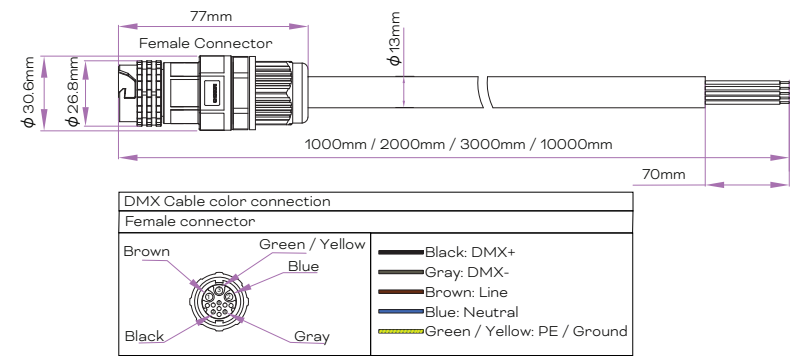


Washer Pro Mini / Midi / Maxi AC Interconnection Cable (CE) (XE.IG.0100000 / XE.IG.0200000 / XE.IG.0300000 / XE.IG.1000000)

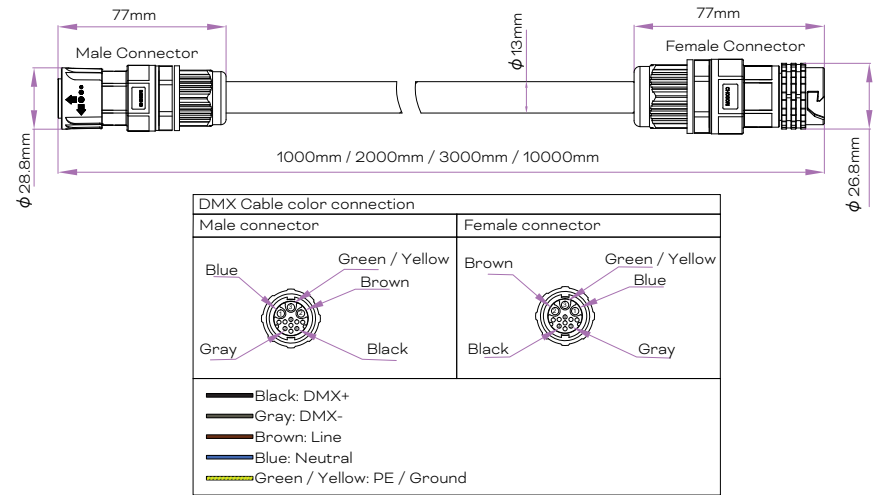

Install expansion screws on the fixed surface


M8 nut (must) and then either one of the M6 nuts is needed (by others)



The size of the bracket mounting holes determines the size of the holes to be punched.

Fix the bracket

- 1 Fix bracket via M8 nut with a flat washer (by others).
- 2 Further secure using either of the holes via M6 nut with a flat washer (by others).

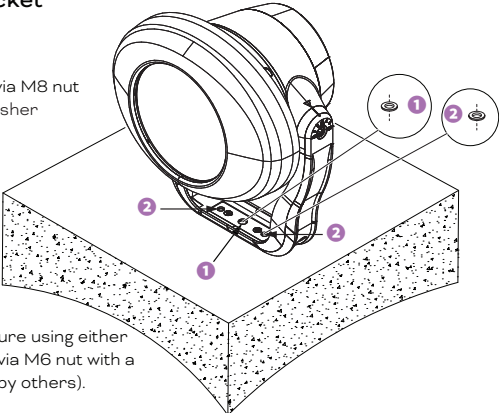

Adjust desired angles


5mm hex key (not included)

Fixture head can be tilted from -5° to +95°

Tilting angle at maximum -5°, otherwise, can lead to damage of the fixture

Safety wire hole

Please mark this safety wire hole as an indicator for angle tilting direction

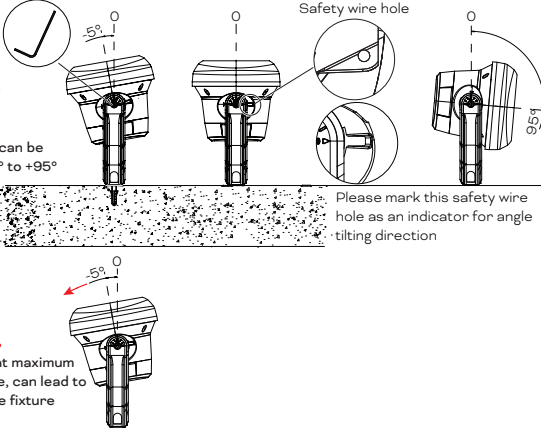


Tighten the bracket bolts to fix the luminaire to the desired angle


5mm hex key (not included)

Safety wire hole

The safety wire must be installed to provide secondary protection to prevent fixtures from falling and injuring people.

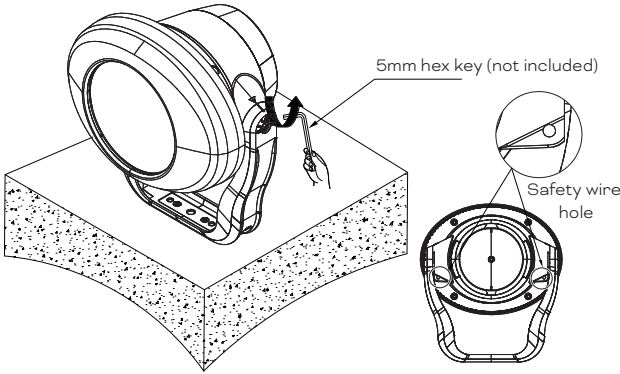

Wiring Diagram with Injector Box

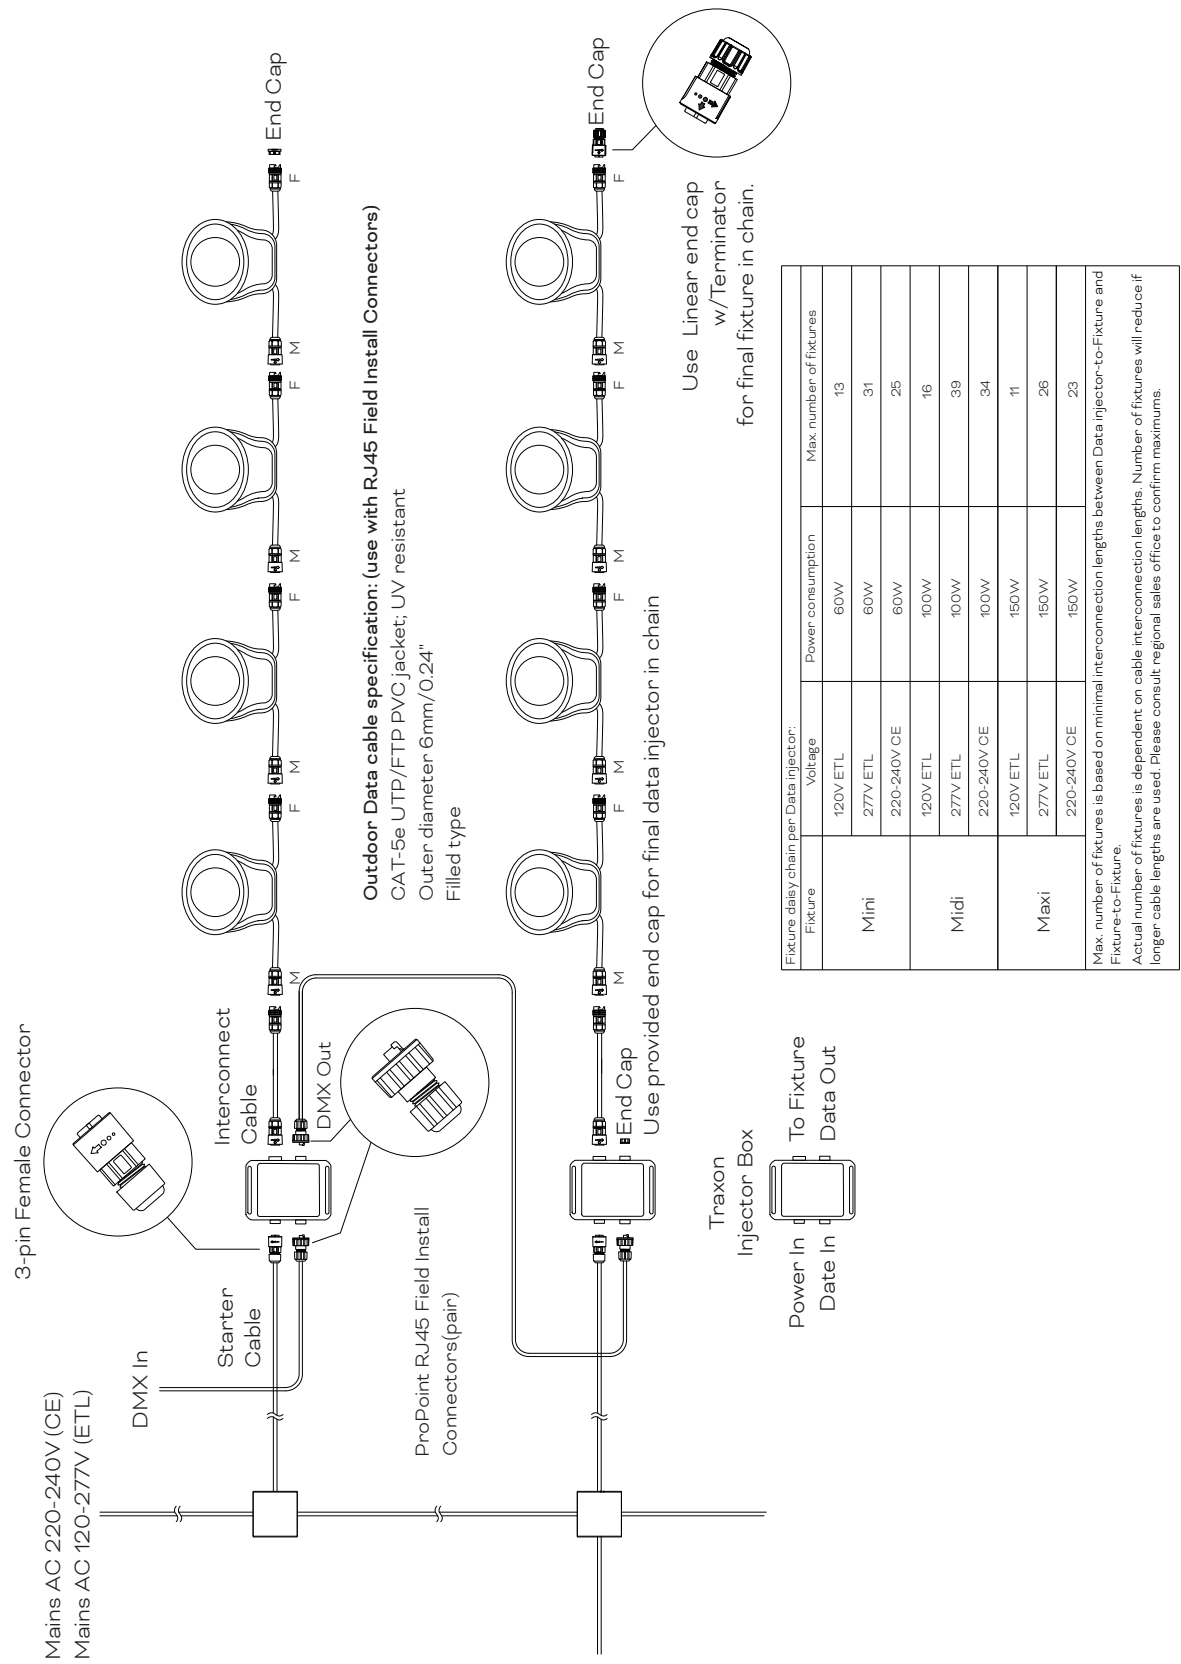

Fixtures Model Number

XB.	WP.	3	2	6	26	N	N	0	6	N	2	0
		Housing Size	DC / AC	Wattage	LED	CCT	Optics	Control	Approbation	Color Finish		
		3 - Mini	2 - AC	6 - 60W*	26 - Multi-Color	C - DGBVCLA	5 - 15°	0 - DMX / RDM	6 - CE	0 - TX Gray		
						D - RGBW65CLA	6 - 20°			1 - Gray		
						E - RGBMCLA	7 - 30°			2 - Black		
						F - RGBAW27W40W65	H - 50°			3 - White		
							9 - 60°					
							I - 85°					
							J - 40x20°					
							K - 60x35°					

Desired Model Number:											
XB.	WP.	3	2	6	26			0	6		2 0
*The power can be set in the factory to achieve a fixed maximum power output to match project specifications and environmental targets (Washer Pro Mini: 30W-60W).											

Fixtures - DGBVCLA

Model No.	Description	Item Code
XB.WP.32626C506020	WASHER PRO MINI AC 60W DGBVCLA 15° CE (CC)	DL25102641255
XB.WP.32626C606020	WASHER PRO MINI AC 60W DGBVCLA 20° CE (CC)	DL25102641355
XB.WP.32626C706020	WASHER PRO MINI AC 60W DGBVCLA 30° CE (CC)	DL25102641455
XB.WP.32626CH06020	WASHER PRO MINI AC 60W DGBVCLA 50° CE (CC)	DL25102641555
XB.WP.32626C906020	WASHER PRO MINI AC 60W DGBVCLA 60° CE (CC)	DL25102641655
XB.WP.32626CI06020	WASHER PRO MINI AC 60W DGBVCLA 85° CE (CC)	DL25102641755
XB.WP.32626CJ06020	WASHER PRO MINI AC 60W DGBVCLA 40°x20° CE (CC)	DL25102641855
XB.WP.32626CK06020	WASHER PRO MINI AC 60W DGBVCLA 60°x35° CE (CC)	DL25102641955
XB.WP.32626C506120	WASHER PRO MINI AC 60W DGBVCLA 15° CE Gray (CC)	DL25102642055
XB.WP.32626C606120	WASHER PRO MINI AC 60W DGBVCLA 20° CE Gray (CC)	DL25102642155
XB.WP.32626C706120	WASHER PRO MINI AC 60W DGBVCLA 30° CE Gray (CC)	DL25102642255
XB.WP.32626CH06120	WASHER PRO MINI AC 60W DGBVCLA 50° CE Gray (CC)	DL25102642355
XB.WP.32626C906120	WASHER PRO MINI AC 60W DGBVCLA 60° CE Gray (CC)	DL25102642455
XB.WP.32626CI06120	WASHER PRO MINI AC 60W DGBVCLA 85° CE Gray (CC)	DL25102642555
XB.WP.32626CJ06120	WASHER PRO MINI AC 60W DGBVCLA 40°x20° CE Gray (CC)	DL25102642655
XB.WP.32626CK06120	WASHER PRO MINI AC 60W DGBVCLA 60°x35° CE Gray (CC)	DL25102642755
XB.WP.32626C506220	WASHER PRO MINI AC 60W DGBVCLA 15° CE Black (CC)	DL25102642855
XB.WP.32626C606220	WASHER PRO MINI AC 60W DGBVCLA 20° CE Black (CC)	DL25102642955
XB.WP.32626C706220	WASHER PRO MINI AC 60W DGBVCLA 30° CE Black (CC)	DL25102643055
XB.WP.32626CH06220	WASHER PRO MINI AC 60W DGBVCLA 50° CE Black (CC)	DL25102643155
XB.WP.32626C906220	WASHER PRO MINI AC 60W DGBVCLA 60° CE Black (CC)	DL25102643255
XB.WP.32626CI06220	WASHER PRO MINI AC 60W DGBVCLA 85° CE Black (CC)	DL25102643355
XB.WP.32626CJ06220	WASHER PRO MINI AC 60W DGBVCLA 40°x20° CE Black (CC)	DL25102643455
XB.WP.32626CK06220	WASHER PRO MINI AC 60W DGBVCLA 60°x35° CE Black (CC)	DL25102643555
XB.WP.32626C506320	WASHER PRO MINI AC 60W DGBVCLA 15° CE White (CC)	DL25102643655
XB.WP.32626C606320	WASHER PRO MINI AC 60W DGBVCLA 20° CE White (CC)	DL25102643755
XB.WP.32626C706320	WASHER PRO MINI AC 60W DGBVCLA 30° CE White (CC)	DL25102643855
XB.WP.32626CH06320	WASHER PRO MINI AC 60W DGBVCLA 50° CE White (CC)	DL25102643955
XB.WP.32626C906320	WASHER PRO MINI AC 60W DGBVCLA 60° CE White (CC)	DL25102644055
XB.WP.32626CI06320	WASHER PRO MINI AC 60W DGBVCLA 85° CE White (CC)	DL25102644155
XB.WP.32626CJ06320	WASHER PRO MINI AC 60W DGBVCLA 40°x20° CE White (CC)	DL25102644255
XB.WP.32626CK06320	WASHER PRO MINI AC 60W DGBVCLA 60°x35° CE White (CC)	DL25102644355

Fixtures - RGBW65CLA

Model No.	Description	Item Code
XB.WP.32626D506020	WASHER PRO MINI AC 60W RGBW65CLA 15° CE (CC)	DL25102666855
XB.WP.32626D606020	WASHER PRO MINI AC 60W RGBW65CLA 20° CE (CC)	DL25102666955
XB.WP.32626D706020	WASHER PRO MINI AC 60W RGBW65CLA 30° CE (CC)	DL25102667055
XB.WP.32626DH06020	WASHER PRO MINI AC 60W RGBW65CLA 50° CE (CC)	DL25102667155
XB.WP.32626D906020	WASHER PRO MINI AC 60W RGBW65CLA 60° CE (CC)	DL25102667255
XB.WP.32626DI06020	WASHER PRO MINI AC 60W RGBW65CLA 85° CE (CC)	DL25102667355
XB.WP.32626DJ06020	WASHER PRO MINI AC 60W RGBW65CLA 40°x20° CE (CC)	DL25102667455
XB.WP.32626DK06020	WASHER PRO MINI AC 60W RGBW65CLA 60°x35° CE (CC)	DL25102667555
XB.WP.32626D506120	WASHER PRO MINI AC 60W RGBW65CLA 15° CE Gray (CC)	DL25102667655
XB.WP.32626D606120	WASHER PRO MINI AC 60W RGBW65CLA 20° CE Gray (CC)	DL25102667755
XB.WP.32626D706120	WASHER PRO MINI AC 60W RGBW65CLA 30° CE Gray (CC)	DL25102667855
XB.WP.32626DH06120	WASHER PRO MINI AC 60W RGBW65CLA 50° CE Gray (CC)	DL25102667955
XB.WP.32626D906120	WASHER PRO MINI AC 60W RGBW65CLA 60° CE Gray (CC)	DL25102668055
XB.WP.32626DI06120	WASHER PRO MINI AC 60W RGBW65CLA 85° CE Gray (CC)	DL25102668155
XB.WP.32626DJ06120	WASHER PRO MINI AC 60W RGBW65CLA 40°x20° CE Gray (CC)	DL25102668255
XB.WP.32626DK06120	WASHER PRO MINI AC 60W RGBW65CLA 60°x35° CE Gray (CC)	DL25102668355
XB.WP.32626D506220	WASHER PRO MINI AC 60W RGBW65CLA 15° CE Black (CC)	DL25102668455
XB.WP.32626D606220	WASHER PRO MINI AC 60W RGBW65CLA 20° CE Black (CC)	DL25102668555
XB.WP.32626D706220	WASHER PRO MINI AC 60W RGBW65CLA 30° CE Black (CC)	DL25102668655
XB.WP.32626DH06220	WASHER PRO MINI AC 60W RGBW65CLA 50° CE Black (CC)	DL25102668755
XB.WP.32626D906220	WASHER PRO MINI AC 60W RGBW65CLA 60° CE Black (CC)	DL25102668855
XB.WP.32626DI06220	WASHER PRO MINI AC 60W RGBW65CLA 85° CE Black (CC)	DL25102668955
XB.WP.32626DJ06220	WASHER PRO MINI AC 60W RGBW65CLA 40°x20° CE Black (CC)	DL25102669055
XB.WP.32626DK06220	WASHER PRO MINI AC 60W RGBW65CLA 60°x35° CE Black (CC)	DL25102669155
XB.WP.32626D506320	WASHER PRO MINI AC 60W RGBW65CLA 15° CE White (CC)	DL25102669255
XB.WP.32626D606320	WASHER PRO MINI AC 60W RGBW65CLA 20° CE White (CC)	DL25102669355
XB.WP.32626D706320	WASHER PRO MINI AC 60W RGBW65CLA 30° CE White (CC)	DL25102669455
XB.WP.32626DH06320	WASHER PRO MINI AC 60W RGBW65CLA 50° CE White (CC)	DL25102669555
XB.WP.32626D906320	WASHER PRO MINI AC 60W RGBW65CLA 60° CE White (CC)	DL25102669655
XB.WP.32626DI06320	WASHER PRO MINI AC 60W RGBW65CLA 85° CE White (CC)	DL25102669755
XB.WP.32626DJ06320	WASHER PRO MINI AC 60W RGBW65CLA 40°x20° CE White (CC)	DL25102669855
XB.WP.32626DK06320	WASHER PRO MINI AC 60W RGBW65CLA 60°x35° CE White (CC)	DL25102669955

Fixtures - RGBMCLA

Model No.	Description	Item Code
XB.WP.32626E506020	WASHER PRO MINI AC 60W RGBMCLA 15° CE (CC)	DL25102692455
XB.WP.32626E606020	WASHER PRO MINI AC 60W RGBMCLA 20° CE (CC)	DL25102692555
XB.WP.32626E706020	WASHER PRO MINI AC 60W RGBMCLA 30° CE (CC)	DL25102692655
XB.WP.32626EH06020	WASHER PRO MINI AC 60W RGBMCLA 50° CE (CC)	DL25102692755
XB.WP.32626E906020	WASHER PRO MINI AC 60W RGBMCLA 60° CE (CC)	DL25102692855
XB.WP.32626EI06020	WASHER PRO MINI AC 60W RGBMCLA 85° CE (CC)	DL25102692955
XB.WP.32626EJ06020	WASHER PRO MINI AC 60W RGBMCLA 40°x20° CE (CC)	DL25102693055
XB.WP.32626EK06020	WASHER PRO MINI AC 60W RGBMCLA 60°x35° CE (CC)	DL25102693155
XB.WP.32626E506120	WASHER PRO MINI AC 60W RGBMCLA 15° CE Gray (CC)	DL25102693255
XB.WP.32626E606120	WASHER PRO MINI AC 60W RGBMCLA 20° CE Gray (CC)	DL25102693355
XB.WP.32626E706120	WASHER PRO MINI AC 60W RGBMCLA 30° CE Gray (CC)	DL25102693455
XB.WP.32626EH06120	WASHER PRO MINI AC 60W RGBMCLA 50° CE Gray (CC)	DL25102693555
XB.WP.32626E906120	WASHER PRO MINI AC 60W RGBMCLA 60° CE Gray (CC)	DL25102693655
XB.WP.32626EI06120	WASHER PRO MINI AC 60W RGBMCLA 85° CE Gray (CC)	DL25102693755

Fixtures - RGBMCLA

Model No.	Description	Item Code
XB.WP.32626EJ06120	WASHER PRO MINI AC 60W RGBMCLA 40°x20° CE Gray (CC)	DL25102693855
XB.WP.32626EK06120	WASHER PRO MINI AC 60W RGBMCLA 60°x35° CE Gray (CC)	DL25102693955
XB.WP.32626E506220	WASHER PRO MINI AC 60W RGBMCLA 15° CE Black (CC)	DL25102694055
XB.WP.32626E606220	WASHER PRO MINI AC 60W RGBMCLA 20° CE Black (CC)	DL25102694155
XB.WP.32626E706220	WASHER PRO MINI AC 60W RGBMCLA 30° CE Black (CC)	DL25102694255
XB.WP.32626EH06220	WASHER PRO MINI AC 60W RGBMCLA 50° CE Black (CC)	DL25102694355
XB.WP.32626E906220	WASHER PRO MINI AC 60W RGBMCLA 60° CE Black (CC)	DL25102694455
XB.WP.32626EI06220	WASHER PRO MINI AC 60W RGBMCLA 85° CE Black (CC)	DL25102694555
XB.WP.32626EJ06220	WASHER PRO MINI AC 60W RGBMCLA 40°x20° CE Black (CC)	DL25102694655
XB.WP.32626EK06220	WASHER PRO MINI AC 60W RGBMCLA 60°x35° CE Black (CC)	DL25102694755
XB.WP.32626E506320	WASHER PRO MINI AC 60W RGBMCLA 15° CE White (CC)	DL25102694855
XB.WP.32626E606320	WASHER PRO MINI AC 60W RGBMCLA 20° CE White (CC)	DL25102694955
XB.WP.32626E706320	WASHER PRO MINI AC 60W RGBMCLA 30° CE White (CC)	DL25102695055
XB.WP.32626EH06320	WASHER PRO MINI AC 60W RGBMCLA 50° CE White (CC)	DL25102695155
XB.WP.32626E906320	WASHER PRO MINI AC 60W RGBMCLA 60° CE White (CC)	DL25102695255
XB.WP.32626EI06320	WASHER PRO MINI AC 60W RGBMCLA 85° CE White (CC)	DL25102695355
XB.WP.32626EJ06320	WASHER PRO MINI AC 60W RGBMCLA 40°x20° CE White (CC)	DL25102695455
XB.WP.32626EK06320	WASHER PRO MINI AC 60W RGBMCLA 60°x35° CE White (CC)	DL25102695555

Fixtures - RGBAW27W40W65

Model No.	Description	Item Code
XB.WP.32626F506020	WASHER PRO MINI AC 60W RGBAW27W40W65 15° CE (CC)	DL25102718055
XB.WP.32626F606020	WASHER PRO MINI AC 60W RGBAW27W40W65 20° CE (CC)	DL25102718155
XB.WP.32626F706020	WASHER PRO MINI AC 60W RGBAW27W40W65 30° CE (CC)	DL25102718255
XB.WP.32626FH06020	WASHER PRO MINI AC 60W RGBAW27W40W65 50° CE (CC)	DL25102718355
XB.WP.32626F906020	WASHER PRO MINI AC 60W RGBAW27W40W65 60° CE (CC)	DL25102718455
XB.WP.32626FI06020	WASHER PRO MINI AC 60W RGBAW27W40W65 85° CE (CC)	DL25102718555
XB.WP.32626FJ06020	WASHER PRO MINI AC 60W RGBAW27W40W65 40°x20° CE (CC)	DL25102718655
XB.WP.32626FK06020	WASHER PRO MINI AC 60W RGBAW27W40W65 60°x35° CE (CC)	DL25102718755
XB.WP.32626F506120	WASHER PRO MINI AC 60W RGBAW27W40W65 15° CE Gray (CC)	DL25102718855
XB.WP.32626F606120	WASHER PRO MINI AC 60W RGBAW27W40W65 20° CE Gray (CC)	DL25102718955
XB.WP.32626F706120	WASHER PRO MINI AC 60W RGBAW27W40W65 30° CE Gray (CC)	DL25102719055
XB.WP.32626FH06120	WASHER PRO MINI AC 60W RGBAW27W40W65 50° CE Gray (CC)	DL25102719155
XB.WP.32626F906120	WASHER PRO MINI AC 60W RGBAW27W40W65 60° CE Gray (CC)	DL25102719255
XB.WP.32626FI06120	WASHER PRO MINI AC 60W RGBAW27W40W65 85° CE Gray (CC)	DL25102719355
XB.WP.32626FJ06120	WASHER PRO MINI AC 60W RGBAW27W40W65 40°x20° CE Gray (CC)	DL25102719455
XB.WP.32626FK06120	WASHER PRO MINI AC 60W RGBAW27W40W65 60°x35° CE Gray (CC)	DL25102719555
XB.WP.32626F506220	WASHER PRO MINI AC 60W RGBAW27W40W65 15° CE Black (CC)	DL25102719655
XB.WP.32626F606220	WASHER PRO MINI AC 60W RGBAW27W40W65 20° CE Black (CC)	DL25102719755
XB.WP.32626F706220	WASHER PRO MINI AC 60W RGBAW27W40W65 30° CE Black (CC)	DL25102719855
XB.WP.32626FH06220	WASHER PRO MINI AC 60W RGBAW27W40W65 50° CE Black (CC)	DL25102719955
XB.WP.32626F906220	WASHER PRO MINI AC 60W RGBAW27W40W65 60° CE Black (CC)	DL25102720055
XB.WP.32626FI06220	WASHER PRO MINI AC 60W RGBAW27W40W65 85° CE Black (CC)	DL25102720155
XB.WP.32626FJ06220	WASHER PRO MINI AC 60W RGBAW27W40W65 40°x20° CE Black (CC)	DL25102720255
XB.WP.32626FK06220	WASHER PRO MINI AC 60W RGBAW27W40W65 60°x35° CE Black (CC)	DL25102720355
XB.WP.32626F506320	WASHER PRO MINI AC 60W RGBAW27W40W65 15° CE White (CC)	DL25102720455
XB.WP.32626F606320	WASHER PRO MINI AC 60W RGBAW27W40W65 20° CE White (CC)	DL25102720555
XB.WP.32626F706320	WASHER PRO MINI AC 60W RGBAW27W40W65 30° CE White (CC)	DL25102720655

Fixtures - RGBAW27W40W65

Model No.	Description	Item Code
XB.WP.32626FH06320	WASHER PRO MINI AC 60W RGBAW27W40W65 50° CE White (CC)	DL25102720755
XB.WP.32626F906320	WASHER PRO MINI AC 60W RGBAW27W40W65 60° CE White (CC)	DL25102720855
XB.WP.32626FI06320	WASHER PRO MINI AC 60W RGBAW27W40W65 85° CE White (CC)	DL25102720955
XB.WP.32626FJ06320	WASHER PRO MINI AC 60W RGBAW27W40W65 40°x20° CE White (CC)	DL25102721055
XB.WP.32626FK06320	WASHER PRO MINI AC 60W RGBAW27W40W65 60°x35° CE White (CC)	DL25102721155

TX Injector

Model No.	Description	Item Code
PP.AC.100001	TX INJECTOR (CC)	AM374890055
PP.AC.100002	TX INJECTOR (CC) BL	AM374900055
PP.AC.100003	TX INJECTOR (CC) WT	AM374910055
PP.AC.400000	TX INJECTOR RJ45 FLD CTRS (PAIR)	AM380560055

Cable/Connector for AC fixture

Model No.	Description	Item Code
PP.A2.303000	3M TX-INJ (CC) POWER INPUT CABLE CE	AM374840055
XE.IG.0100000	1M AL INTERCONNECTION CABLE CC CE	AM473670055
XE.IG.0200000	2M AL INTERCONNECTION CABLE CC CE	AM473660055
XE.IG.0300000	3M AL INTERCONNECTION CABLE CC CE	AM473650055
XE.IG.1000000	10M AL INTERCONNECTION CABLE CC CE	AM473640055
CA.SC.CC301000	STARTER CABLE CC AC 5-PIN 1M CE	DA23100149755
CA.SC.CC302000	STARTER CABLE CC AC 5-PIN 2M CE	DA23100149855
CA.SC.CC303000	STARTER CABLE CC AC 5-PIN 3M CE	DA23100149955
CA.SC.CC310000	STARTER CABLE CC AC 5-PIN 10M CE	DA23100150055
PP.AC.600000	AL END CAP W/TERM (CC)	AM380550055

Spread Lens

Model No.	Description	Item Code
WP.SM.314000	W PRO SYMPHONY SL KIT 20° MINI	DA25102737455
WP.SM.315000	W PRO SYMPHONY SL KIT 30° MINI	DA25102737955
WP.SM.316000	W PRO SYMPHONY SL KIT 50° MINI	DA25102738455
WP.SM.317000	W PRO SYMPHONY SL KIT 60° MINI	DA25102738955
WP.SM.318000	W PRO SYMPHONY SL KIT 85° MINI	DA25102739455
WP.SM.319000	W PRO SYMPHONY SL KIT 40°x20° MINI	DA25102739955
WP.SM.320000	W PRO SYMPHONY SL KIT 60°x35° MINI	DA25102740455

Glare Shield

Model No.	Description	Item Code
WP.AG.300000	W PRO GS ANGLED KIT MINI	DA23100030655
WP.FG.300000	W PRO GS FULL KIT MINI	DA23100031455
WP.AG.300100	W PRO GS ANGLED KIT MINI Gray	DA23100150455
WP.FG.300100	W PRO GS FULL KIT MINI Gray	DA23100150955
WP.AG.300200	W PRO GS ANGLED KIT MINI Black	DA23100151455
WP.FG.300200	W PRO GS FULL KIT MINI Black	DA23100151955
WP.AG.300300	W PRO GS ANGLED KIT MINI White	DA23100152455
WP.FG.300300	W PRO GS FULL KIT MINI White	DA23100152955

Rock Guard

Model No.	Description	Item Code
WP.RG.300000	W PRO RG MINI	DA23100032255
WP.RG.300100	W PRO RG MINI Gray	DA23100153255
WP.RG.300200	W PRO RG MINI Black	DA23100153555
WP.RG.300300	W PRO RG MINI White	DA23100153855

Rotatable Mount Plate

Model No.	Description	Item Code
WP.RP.300000	W PRO RP MINI	DA23100032755
WP.RP.300100	W PRO RP MINI Gray	DA23100154355
WP.RP.300200	W PRO RP MINI Black	DA23100154755
WP.RP.300300	W PRO RP MINI White	DA23100155155

Tree Ring Mount

Model No.	Description	Item Code
WP.TR.A00000	W PRO TREE RING	DA24102288155
N / A	W PRO MINI/ MIDI/ MAXI TREE RING MOUNTING PLATE	DA24102307255
N / A	W PRO MINI/ MIDI/ MAXI TREE RING ADAPTOR KIT FOR RP	DA24102288455
N / A	W PRO TX INJECTOR TREE RING MOUNTING PLATE	DA24102307355

Stake Mount

Model No.	Description	Item Code
WP.ST.300000	W PRO STAKE KIT MINI	DA24102307655

Others

Model No.	Description	Item Code
By request	Post Mount	On demand / Coming soon
On demand / Coming soon	Compression Post Mount	On demand / Coming soon
On demand / Coming soon	Extendable Mounting Arm	On demand/ Coming soon
On demand / Coming soon	Pendant Mount	On demand / Coming soon

