



---

## LUXPOINT® LED Recessed Downlight - Filbert Datasheet



Our Luitbert LED Slim Downlight is an ultra-thin, canless recessed light perfect for tight ceiling spaces. With easy spring-clip installation, it offers dimmable lighting and selectable color temperatures. Its sleek, modern design blends seamlessly into kitchens, bathrooms, hallways, and living areas, delivering long-lasting, energy-efficient illumination with a minimalist look.

### Benefits

- Versatile Light Options
- Environmentally Friendly
- Easy Installation & Maintenance
- Wide Range of Application

### Applications

- Office
- Hotel
- Shop
- Station
- Restaurant
- Other demanding environments

# LUXPOINT® LED Recessed Downlight - Filbert

## Technical Data

### Optical Specifications

Wattage		6W	7W	11.5W	15W	20.5W
Luminous Flux @CCT	3000K	440lm	550lm	1000lm	1400lm	1800lm
	4000K	470lm	570lm	1050lm	1500lm	1900lm
	6500K	470lm	570lm	1050lm	1500lm	1900lm
Total luminous flux of contained light sources @CCT	3000K	720lm	850lm	1500lm	1800lm	2550lm
	4000K	750lm	900lm	1580lm	1900lm	2650lm
	6500K	750lm	900lm	1580lm	1900lm	2650lm
Efficacy		73lm/W	79lm/W	87lm/W	93lm/W	88lm/W
Flickering metric (Pst LM)		<1	<1	<1	<1	<1
Stroboscope effect metric (SVM)		<0.4	<0.4	<0.4	<0.4	<0.4
CRI		≥80	≥80	≥80	≥80	≥80
SDCM		< 6	< 6	< 6	< 6	< 6
Beam Angle		110°				
Photobiological safety group acc. To EN62778		RG0	RG0	RG0	RG0	RG0
Photobiological safety group acc. To EN62471		RG0	RG0	RG0	RG0	RG0
Dimmable		No	No	No	No	No

### Electrical and Mechanical Specifications


Input Voltage		220-240V ~50/60Hz				
Nominal Current		39mA	46mA	80mA	107mA	145mA
Inrush current time Th50		128µs@25A	172µs@25A	176µs@25A	184µs@25A	232µs@25A
Power Factor		0.5	0.5	0.5	0.5	0.5
Max. number of luminaires per miniature circuit breaker	B16	122	92	84	68	48
	C10	126	95	87	70	49
	C16	207	156	142	115	81
Protection class		Class II	Class II	Class II	Class II	Class II
Dimensions		D 100mm	D 115mm	D 145mm	D 170mm	D 220mm
		H 30mm	H 30mm	H 30mm	H 30mm	H 30mm
Weight		59g	74g	105g	147g	257g
Housing		Polycarbonate(PC)				
Diffuser		Polystyrene (PS)				
Replaceable light source		No				
Replaceable Control gear		No				
Glow wire test according to IEC60695-2-12		650°C				

### System Specifications


Power	AC mains
Operating Temperature	-10°C ~ 45°C
Storage Temperature	-20°C ~ 60°C
Lifespan L70/B50 at 45°C	15,000 hours
Lifespan L70/B50 at 25°C	50,000 hours
Number of switching cycles	15,000
Environment	Indoor
Safety Approval	CE, UKCA, RoHS
Mercury content	0.0mg
Warranty	3 years

# LUXPOINT® LED Recessed Downlight - Filbert Dimension


6W

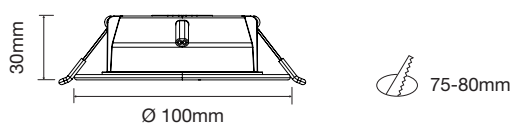


7W

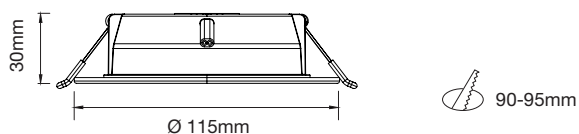


11.5W

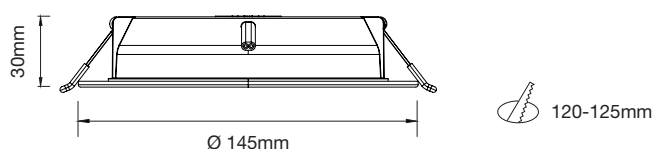

15W

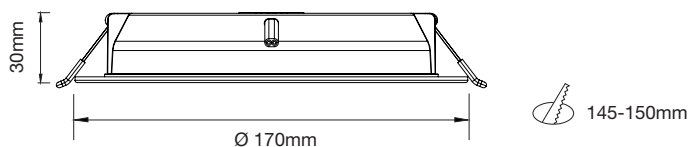

20.5W

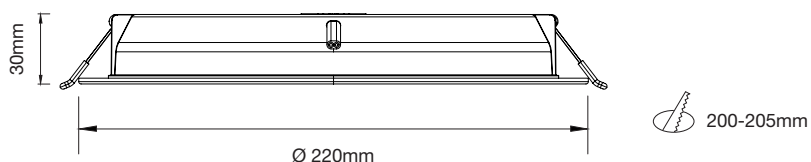

Due to the special conditions of manufacturing process of LED, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from typical data.

Exceeding maximum ratings for operation voltage will cause hazardous overload and will likely destroy the LED module.

Exceeding maximum ratings for operation and storage temperature will reduce expected life time or destroy the LED module.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

# LUXPOINT® LED Recessed Downlight - Filbert

## Ordering codes

### Fixture

Short Text	Wattage	CCT	Fixture Lumen	Light Source Lumen	Beam Angle	Item code	EAN-13
LP DL D75 6W 830 RD	6W	3000K	440lm	720lm	110°	TXGL25100017355	4897135736074
LP DL D75 6W 840 RD	6W	4000K	470lm	750lm	110°	TXGL25100017455	4897135736081
LP DL D75 6W 865 RD	6W	6500K	470lm	750lm	110°	TXGL25100017555	4897135736098
LP DL D90 7W 830 RD	7W	3000K	550lm	850lm	110°	TXGL25100017655	4897135736104
LP DL D90 7W 840 RD	7W	4000K	570lm	900lm	110°	TXGL25100017755	4897135736111
LP DL D90 7W 865 RD	7W	6500K	570lm	900lm	110°	TXGL25100017855	4897135736128
LP DL D120 11.5W 830 RD	11.5W	3000K	1000lm	1500lm	110°	TXGL25100017955	4897135736135
LP DL D120 11.5W 840 RD	11.5W	4000K	1050lm	1580lm	110°	TXGL25100018055	4897135736142
LP DL D120 11.5W 865 RD	11.5W	6500K	1050lm	1580lm	110°	TXGL25100018155	4897135736159
LP DL D145 15W 830 RD	15W	3000K	1400lm	1800lm	110°	TXGL25100018255	4897135736166
LP DL D145 15W 840 RD	15W	4000K	1500lm	1900lm	110°	TXGL25100018355	4897135736173
LP DL D145 15W 865 RD	15W	6500K	1500lm	1900lm	110°	TXGL25100018455	4897135736180
LP DL D195 20.5W 830 RD	20.5W	3000K	1800lm	2550lm	110°	TXGL25100018555	4897135736197
LP DL D195 20.5W 840 RD	20.5W	4000K	1900lm	2650lm	110°	TXGL25100018655	4897135736203
LP DL D195 20.5W 865 RD	20.5W	6500K	1900lm	2650lm	110°	TXGL25100018755	4897135736210

Service contact:  
 Traxon Technologies Ltd.  
 Room 1604, 16/F, First Group Centre, 23 Wang Chiu Road,  
 Kowloon Bay, Kowloon, Hong Kong, China  
[www.traxon-ecue.com](http://www.traxon-ecue.com)

Traxon Technologies Europe GmbH  
 Im Dörener Feld 8, 33100 Paderborn, Germany