


4x16A DALI2 Relay

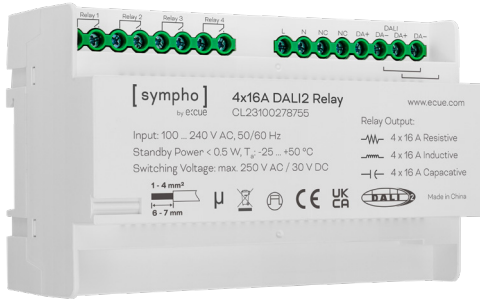

Highlights

- 4 channels relay module
- Control 4 relays separately via DALI: Loads that do not have a DALI input can be integrated in the DALI circuit. The loads can be switched on and off via DALI.
- Compatible with universal DALI systems and master controllers in the market
- DIN rail installation, compatible with standard 35mm DIN rail

Delivery Content

- SYMPHO 4x16A DALI2 Relay
- Welcome note
- Instructions

Optional accessories

- SYMPL dali Node

Identcode

CL23100278755

AB444230035

e:cue Interfaces

Lighting applications are heterogenous by nature. e:cue interfaces serve to integrate many networks, protocols and third party products into e:cue solutions. They also aid in applying special control functions for fixtures, they integrate analog or mechanical signaling into the digital world and offer bridging functions. e:cue interfaces are the links to bring together the many techniques and technologies of lighting control.

Product Specifications

Dimensions (W x H x D)	145.4 x 90 x 66.4 mm / 5.72 x 3.54 x 2.61 in
Weight	180 g
Material	PC
Mounting	On 35 mm DIN rail (EN 60715)
Installation condition	Indoor
Certificates	CE, UKCA, DALI-2, RoHS

Electrical information

Input Power	100 ... 240 V AC, 50/60 Hz
Power Consumption	max. 0.96 W (when relay contact closes or opens)
Standby Power	< 0.5 W
Control	DALI
Stripping Length	6 ... 7 mm / 0.24 ... 0.28 in

Interface specifications

Input	1 x DALI, wire gauge: 1 ... 4 mm ²
Output	4 x relay, NC, volt-free, wire gauge: 2.5 mm ² (modifiable according to real application), switching voltage: max. 250 V AC / 30 V DC, 4 DALI addresses

Load Type Max. current

Resistive, Inductive, Capacitive	4 x 16 A
--	----------

Load Type Max. Load

Resistive, Inductive, Capacitive	4 x 3680 W @ 230 V AC 4 x 1760 W @ 110 V AC
--	--

1 x DALI, wire gauge: 1 ... 4 mm²




Environment

Operating Temperature Range	-25 ... 50 °C / -13 ... 122 °F
Operating Humidity	5 ... 95% (non condensing)
Storage Temperature Range	-25 ... 50 °C / -13 ... 122 °F
Storage Humidity	5 ... 95% (non condensing)

4x16A DALI2 Relay

Dimensions

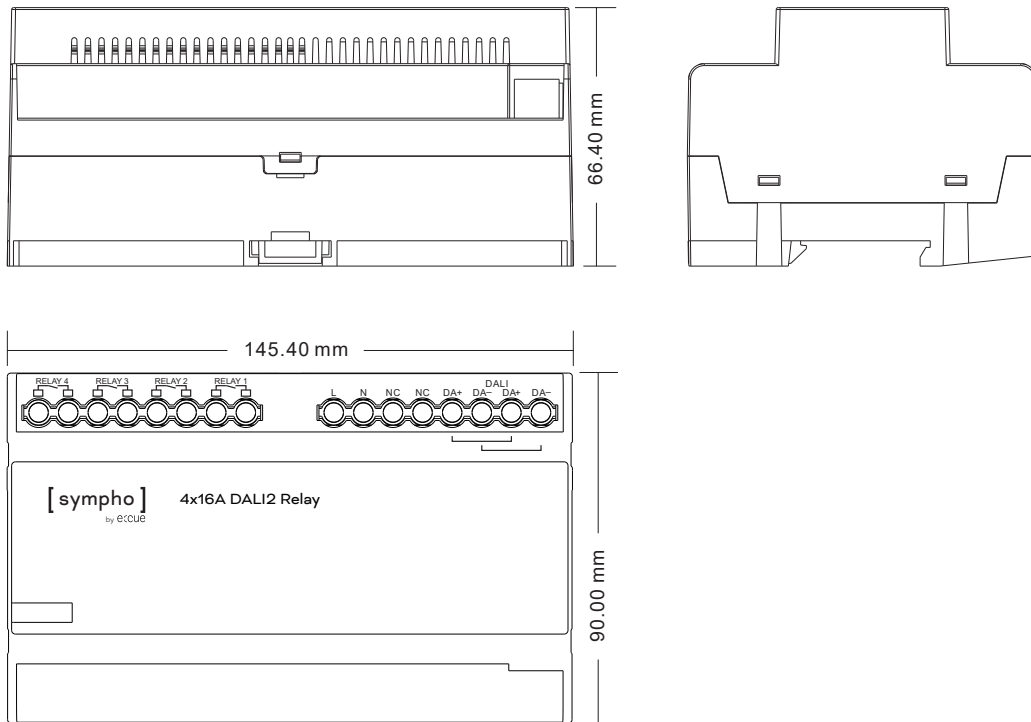

System diagram

A) e:net (ethernet based protocol)

B) DALI

C) 4x 16A/ max. 250V AC /max. 30V DC

